



12" MONITOR

ORL0411000

Monitor 12" RLED R4

- 12-30 V DC
- Provozní teplota -40 až +85 ° C
- Rozlišení XGA 1024xRGBx768 pixelů



POPIS PRODUKTU

Dvanáctipalcový monitor je perfektní, když chcete vidět více než jeden obraz najednou, například pokud chcete použít Orlaco „Surroundview“. Tyto monitory mají stupeň krytí IP67 a automatické nastavení světla.

SPECIFIKACE

Délka kabelu	4000 mm
Formát obrazu	04:03
Napájecí napětí DC max.	30 V DC
Napájecí napětí DC min.	12 V DC
Odolnost proti vibracím	50 g
Provozní teplota max.	85 °C
Provozní teplota min.	-40 °C
Třída krytí	IP67
Typ	Analog
Velikost displeje	12

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- | | |
|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V |
| 2 = White | = Power input: 0V |
| 3 = Blue | = Cam No. 1 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V |
| 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 6 = Grey | = Aux 1 activated at 12V...30V |
| 7 = Yellow | = Aux 2 activated at 12V...30V |
| Shielding | = To GND |



Front side molded 4p female connector:

- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| Shielding | = To housing |

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- | | | | |
|-----------|-----------------------------------|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V | 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 2 = White | = Power input: 0V | 6 = Grey | = Aux 1 activated at 12...30V |
| 3 = Blue | = Cam No. 1 activated at 12...30V | 7 = Yellow | = Aux 2 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V | Shielding | = To GND |
- Solder side 7p female connector:
- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| 5 = Orange | = RS232 In |
| 6 = Yellow | = RS232 Out |
| 7 = Grey | = Video 2 input |
| Shielding | = To housing |

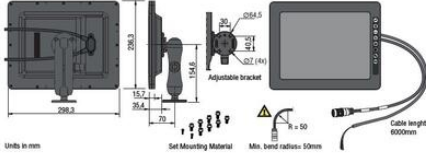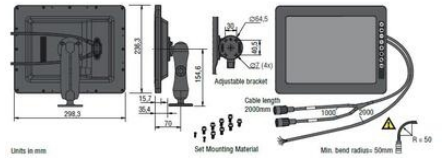

- Electrical connection
- Connections to the monitor: (Secure the power input with a 5A fuse)
- | | |
|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V |
| 2 = White | = Power input: 0V |
| 3 = Blue | = Cam No. 1 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V |
| 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 6 = Grey | = Aux 1 activated at 12V...30V |
| 7 = Yellow | = Aux 2 activated at 12V...30V |
| Shielding | = To GND |
- Front side molded 4p female connector:
- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| Shielding | = To housing |

- Electrical connection
- Connections to the monitor: (Secure the power input with a 5A fuse)
- | | | | |
|-----------|-----------------------------------|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V | 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 2 = White | = Power input: 0V | 6 = Grey | = Aux 1 activated at 12...30V |
| 3 = Blue | = Cam No. 1 activated at 12...30V | 7 = Yellow | = Aux 2 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V | Shielding | = To GND |
- Solder side 7p female connector:
- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| 5 = Orange | = RS232 In |
| 6 = Yellow | = RS232 Out |
| 7 = Grey | = Video 2 input |
| Shielding | = To housing |

