



7" MONITOR HLED

ORL0226010
Monitor 7" HLED

- 12-24 V DC
- Provozní teplota -40 až +85 ° C
- Rozlišení WXGA 1280xRGBx800 pixelů



POPIS PRODUKTU

Integrovaný monitor s vysokým rozlišením je odolný proti ořesům a vibracím, automaticky upravuje jas obrazu podle okolního světla a má korekci zrcadlového obrazu.

Pomocí přepínače Orlaco GMSL lze připojit maximálně čtyři kamery.

SPECIFIKACE

Délka kabelu	1000 mm
Formát obrazu	16:09
Napájecí napětí DC max.	30 V DC
Napájecí napětí DC min.	12 V DC
Provozní teplota max.	75 °C
Provozní teplota min.	-30 °C
Třída krytí	IP67, IP69K
Velikost displeje	7

Power cable open wired (Secure the power input with a 5A fuse)


1 = Red = Video power in: 12V/24V
 2 = Blue = Aux 1
 3 = Brown = Aux 2
 4 = White = Power OV in
 5 = Grey = CAN-H
 6 = Yellow = CAN-L
 7 = White/yellow = N.C.

Video cable front side molded 4p + Coax female connector:

1 = Black = OV
 2 = Red = Power
 3 = Yellow = Aux 1
 4 = Grey = Aux 2
 5 = Coax core = Video
 6 = Coax shield = Video GND
 Shielding = To housing



Dimensions

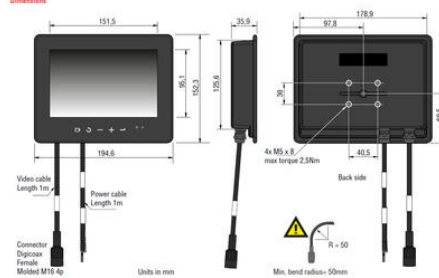

Power cable open wired (Secure the power input with a 5A fuse)

1 = Red = Video power in: 12V/24V
 2 = Blue = Aux 1
 3 = Brown = Aux 2
 4 = White = Power OV in
 5 = Grey = CAN-H
 6 = Yellow = CAN-L
 7 = White/yellow = N.C.

Video cable front side molded 4p + Coax female connector:

1 = Black = OV
 2 = Red = Power
 3 = Yellow = Aux 1
 4 = Grey = Aux 2
 5 = Coax core = Video
 6 = Coax shield = Video GND
 Shielding = To housing



Dimensions

