



FLEXIBILNÍ KABELY

ORL0304371

Flexibilní kabel

- Měkký povrch s malým poloměrem ohybu
- 4 a 7 pinové odlévané konektory M 16
- -40 až + 85 ° C




POPIS PRODUKTU


Vhodné pro použití v pohyblivých aplikacích, například pro kameru namontovanou na rameni, výložníku bagru nebo na nákladním voze se sklápěčem.

SPECIFIKACE

Délka kabelu	500 mm
Materiál	PUR
Připojení	4 pin samec - 4 pin samice
Provozní teplota max.	85 °C
Provozní teplota min.	-40 °C
Průměr kabelu	9 mm
Třída krytí	IP67
Typ	Analog



Front side
4p Male connector




Front side
4p Female connector

Electrical connection

1 = coax core Video
2 = coax shielding Video GND
3 = red 12...30V/DC
4 = black 0V
Orange N.C.
Yellow N.C.
Grey N.C.




Solder side
7P Male connector




Solder side
7P Female connector




Electrical connection Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

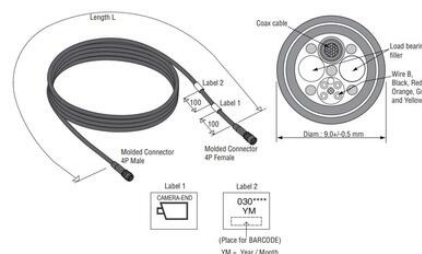


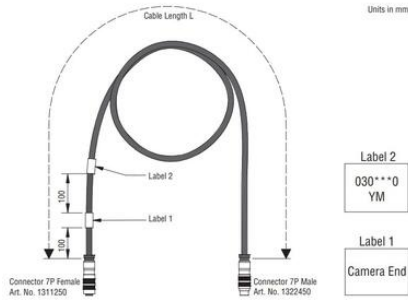

Electrical connection

1 = coax core
2 = coax shielding
3 = red
4 = black
Orange
Yellow
Grey


Video
Video GND
12...30V/DC
0V
N.C.
N.C.
N.C.



Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

