



PISA-M 4-KANÁLOVÝ ELEKTRONICKÝ JISTIČ

Série Pisa-M

PISA-M-4ADJ

Elektr.proud.ochrana 4x1-8A Adjustable

- 4 výstupní kanály: 4x 1-8 A max. 20 A
- Šířka pouze 22,5 mm
- Společný nebo individuální alarm
- Rychlá nebo pomalá charakterizace



PULS

POPIS PRODUKTU

Elektronický jistič Puls PISA-M je 4kanálový přístroj s možností montáže na DIN lištu, pro systémy 12 a 24 V DC. Disponuje malými rozměry, na DIN liště má šířku pouhých 22,5 mm.

SPECIFIKACE

VSTUPNÍ PARAMETRY

Vstupní napětí DC min.	9,6 V DC
Vstupní napětí DC max.	30 V DC

VÝSTUPNÍ PARAMETRY

Max. výstupní proud	20 A
Výstupní proud na kanál	Channel 1-4 :1, 2, 3, 4, 6, 8 A

ÚČINNOST / ŽIVOTNOST / MTBF

Účinnost	98 %
Životnost	268 000 h 4x5 A 40 C
MTBF (IEC 61709)	1 142 000 h 4x5 A 40 C

ROZMERY A HMOTNOST

Šířka	23 mm
Výška	104 mm
Hloubka	98 mm
Hmotnost	0,1 kg

OSTATNÍ PARAMETRY

Shoda s normami	CE, UL 61010-1
Třída krytí	IP20
Svorka	Zatlačit
Rozměr vodiče max.	2,5 mm ²
Kryt	Plast
Pokles napětí na polovodiči při I _{max} .	130 mV

Výstupní konektor	Push-In
Zpětné napájení	30 V DC
Vstupní konektor	Push-In

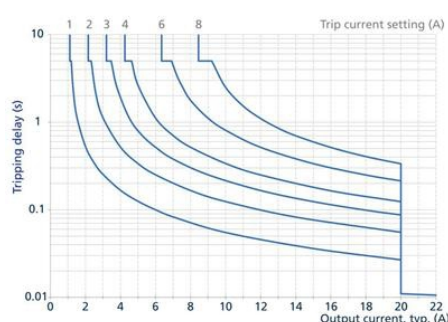


Fig. 6-2: Tripping delay depending on current slow tripping characteristic




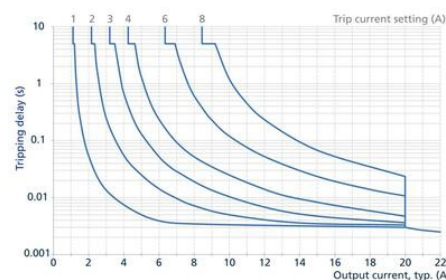


Fig. 6-1: Tripping delay depending on current fast tripping characteristic

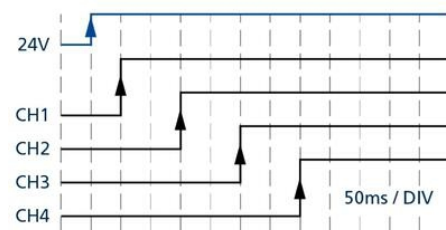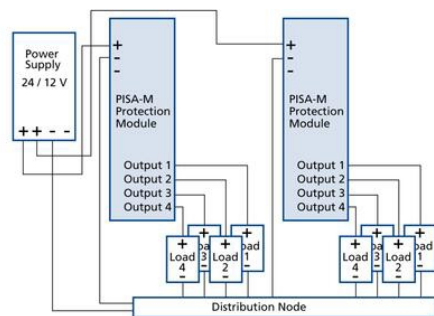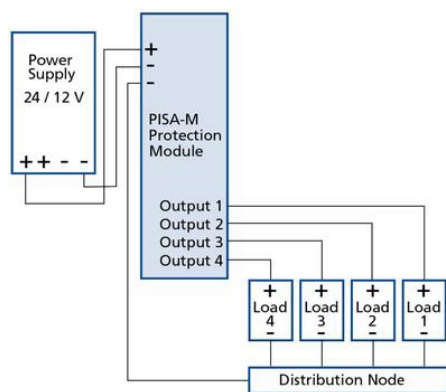

A Input Terminals
Identical poles are internally connected.
(+) 1.1 Positive input pole
(-) 1.2, 1.3 Negative input pole

B Output Terminals
(+) 2.1 Channel 1 positive output pole
(+) 2.2 Channel 2 positive output pole
(+) 2.3 Channel 3 positive output pole
(+) 2.4 Channel 4 positive output pole

C Control Signal Input
(+) 3.1 Signal input positive pole
(-) 3.2 Signal input negative pole
Signal input can be used to send reset signal (1 s active) or for data communication using Digital Coded Interface.

D Status Signal Output
(+) 3.3 Signal output positive pole
(-) 3.4 Signal output negative pole
Signal output can be set to several operation modes.

E Channel Control Buttons
Press of single button to toggle selected output channel ON / OFF
Required duration of button-press can be configured
• Long press of single button to reset selected channel
• Press of button combinations to enter configuration modes
Note: See user manual for more information.

F Output Channel Status LEDs
• Green: Output channel ON
• Yellow: Output channel overload – prewarning before tripping channel
• Red: Output channel turned OFF (manually or remotely)
• Red (flashing): Output channel tripped due to overload of this channel
• Red (double flashing): Output channel tripped due to device overload protection or power supply protection, see chapter 9 and 10
• LED OFF: Device is not powered
Note: For other blinking codes, see user manual

G QR code for direct access to documentation

Fig. 14-1: Front side

5. Turn Output Channels ON or OFF

Each output channel can be switched ON and OFF individually.
The required duration of button press can be configured, see chapter 10 "Button Reaction Style".

- Output channel is ON → LED lights up green
- Output channel is OFF → LED lights up red



- Press the Channel Control Button (CCB) for the output channel to be modified depending on the selected button reaction style:
 - 50 ms in standard mode or
 - 1 s in long press mode
- The output channel will switch between ON and OFF.

6. Check Current Tripping Setpoint of Each Output Channel

Each LED indicates the current tripping setpoint for each output channel.
For example: LED 1 shows setting of output channel 1.

- The number of flashes indicates current setting in ampere.
For example: LED 1 flashes 4 x, set current tripping setpoint for output channel 1 is 4 A.
- The sequence will be shown two times.
- The device exits the checking mode and will return to regular operation.



- Press CCB1 and CCB4 simultaneously for 50 ms.
- Each LED will indicate the current tripping setpoint for each output channel by flashing green.
- Pressing any button during LED flashing stops the checking mode immediately.

12. Select Communication Mode

- The device will exit setting mode automatically after 4 s inactivity.
 - The device is equipped with two signal ports. Signal status output (pin 3.1 – 3.2) and signal control input (pin 3.3 – 3.4). These ports can be configured as follows:
- Tripping Alarm:**
Switch closes when at least one or more output channels are tripped.
- Status Signal Output ON → one or more output channels are tripped
 - Status Signal Output OFF → no output channel tripped
- Digital Coded Interface (DCI):**
For more detailed information regarding DCI mode, please refer to the product datasheet.
- Output Channel Off Alarm:**
Switch closes when one or more channels are tripped or manually turned off.
- Status Signal Output ON → one or more output channels are tripped if turned off
 - Status Signal Output OFF → all output channels are turned on
- OK Signal:**
Switch closes if all output channels are turned on.
- Status Signal Output ON → all output channels are turned on
 - Status Signal Output OFF → one or more output channels are tripped / turned off

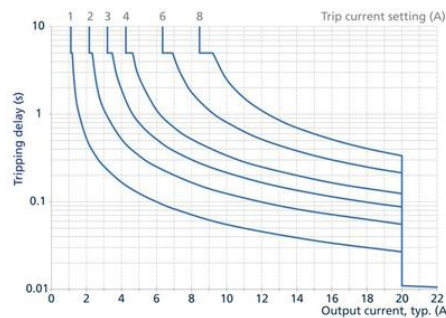
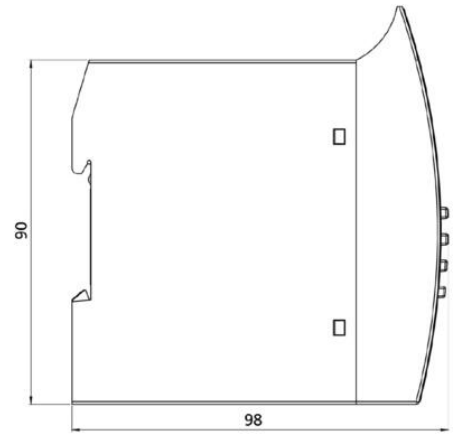
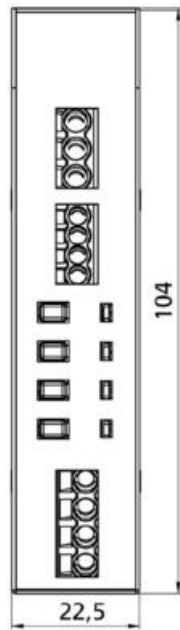


Fig. 6-2: Tripping delay depending on current slow tripping characteristic

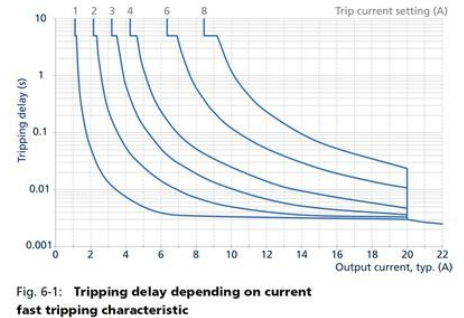


Fig. 6-1: Tripping delay depending on current fast tripping characteristic

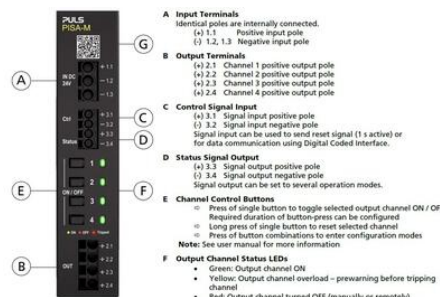
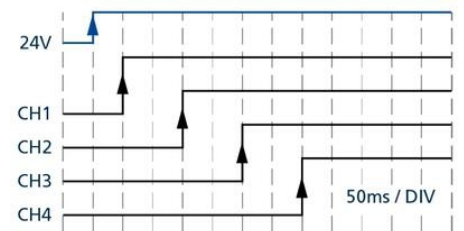
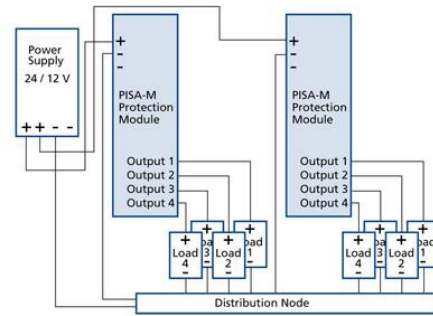
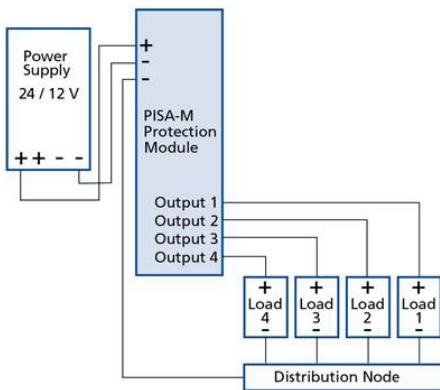


Fig. 14-1: Front side

- A Input Terminals**
Identical poles are internally connected.
(+) 3.1 Positive input pole
(-) 3.2, 3.3 Negative input pole
- B Output Terminals**
(+) 2.1 Channel 1 positive output pole
(-) 2.2 Channel 2 positive output pole
(+) 2.3 Channel 3 positive output pole
(-) 2.4 Channel 4 positive output pole
- C Control Signal Input**
(+) 3.1 Signal input positive pole
(-) 3.2 Signal input negative pole
Signal input can be used to send reset signal (1 s active) or for data communication using Digital Coded Interface.
- D Status Signal Output**
(+) 3.3 Signal output positive pole
(-) 3.4 Signal output negative pole
Signal output can be set to several operation modes.
- E Channel Control Buttons**
Press of single button to toggle selected output channel ON / OFF
Required duration of button press can be configured
Long press of single button to reset selected channel
Press of button combinations to enter configuration modes
Note: See user manual for more information
- F Output Channel Status LEDs**
Green: Output channel ON
Yellow: Output channel overload – prewarning before tripping channel
Red: Output channel turned OFF (manually or remotely)
Red (flashing): Output channel tripped due to overload of this channel
Red (double-flashing): Output channel tripped due to device overload protection or power supply protection, see chapter 9 and 10
LED OFF: Device is not powered
Note: For other blinking codes, see user manual
- G QR code for direct access to documentation**

5. Turn Output Channels ON or OFF

Each output channel can be switched ON and OFF individually. The required duration of button press can be configured, see chapter 10 "Button Reaction Style".

- Output channel is ON → LED lights up green
- Output channel is OFF → LED lights up red



- Press the Channel Control Button (CCB) for the output channel to be modified depending on the selected button reaction style:
 - 50 ms in standard mode or
 - 1 s in long press mode
- The output channel will switch between ON and OFF.

6. Check Current Tripping Setpoint of Each Output Channel

Each LED indicates the current tripping setpoint for each output channel. For example: LED 1 shows setting of output channel 1.

- The number of flashes indicates current setting in amperes. For example: LED 1 flashes 4 x, set current tripping setpoint for output channel 1 is 4 A.
- The sequence will be shown two times.
- The device exits the checking mode and will return to regular operation.



- Press CCB1 and CCB4 simultaneously for 50 ms.
- Each LED will indicate the current tripping setpoint for each output channel by flashing green.
- Pressing any button during LED flashing stops the checking mode immediately.

12. Select Communication Mode

- The device will exit setting mode automatically after 4 s inactivity.

The device is equipped with two signal ports. Signal status output (pin 3.1 - 3.2) and signal control input (pin 3.3 - 3.4). These ports can be configured as follows:

Tripping Alarm:

Switch closes when at least one or more output channels are tripped.

- Status Signal Output ON → one or more output channels are tripped
- Status Signal Output OFF → no output channel tripped

Digital Coded Interface (DCI):

For more detailed information regarding DCI mode, please refer to the product datasheet.

Output Channel Off Alarm:

Switch closes when one or more channels are tripped or manually turned off.

- Status Signal Output ON → one or more output channels are tripped if turned off
- Status Signal Output OFF → all output channels are turned on

OK Signal:

Switch closes if all output channels are turned on.

- Status Signal Output ON → all output channels are turned on
- Status Signal Output OFF → one or more output channels are tripped / turned off

