



KABELY S KONEKTORY

ORL0301900

Kabel 11m 4 Pin

- 4 pinové a 7 pinové konektory M16
- Vyvinuto společností Orlaco pro nejlepší ochranu EMC
- -40 až + 85 ° C



POPIS PRODUKTU

Společnost Orlaco vyvíjí vlastní kabeláž, aby získala nejlepší možný obraz a ochranu EMC. Lisované kontakty zajišťují dobrou ochranu proti vlhkosti. Tyto kabely jsou určeny pro statickou montáž.


Chcete-li použít kabeláž pro mobilní aplikaci, měli byste se podívat na záložku Flexibilní kabely.

SPECIFIKACE

Délka kabelu	11000 mm
Materiál	PVC
Připojení	4 pin samec - 4 pin samice
Provozní teplota max.	85 °C
Provozní teplota min.	-40 °C
Průměr kabelu	6 mm
Třída krytí	IP67
Typ	Analog




Front side female connector




Front side male connector

Electrical connection

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND



Front side molded 7P Female connector





Front side molded 7P Male connector


Electrical connection molded connectors

- 1 = Coax Core
- 2 = Coax Shield
- 3 = Red (Power input)
- 4 = Black (0V)
- 5 = Orange (Rx)
- 6 = Yellow (Tx)
- 7 = Grey (Aux)

Dimensions

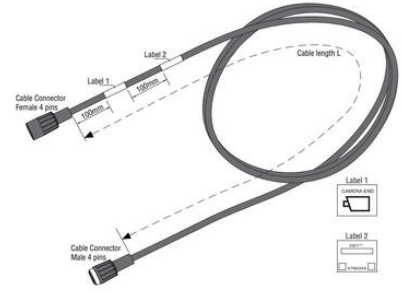


Front side female connector




Front side male connector

Electrical connection

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND



Front side molded 7P Female connector



Front side molded 7P Male connector

Electrical connection molded connectors

- 1 = Coax Core
- 2 = Coax Shield
- 3 = Red (Power input)
- 4 = Black (0V)
- 5 = Orange (Rx)
- 6 = Yellow (Tx)
- 7 = Grey (Aux)

Dimensions

