



KOALESCENČNÍ FILTRY

Série 652

G652AFDP2JA00N

Koalescencní filter, 0,3 μ m, G1/4, polo-automat

- Připojení G1/4, G3/8, G1/2
- Průtok 800 až 870 l/min
- Filtrace 0,3 až 0,01 μ m
- Teplota 1,7 až 50°C
- Tlak max. 16 Bar



POPIS PRODUKTU





SPECIFIKACE

Procesní připojení

G1/4

Průtok max.

800 l/min

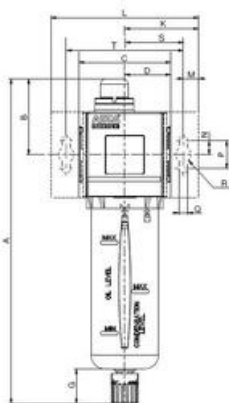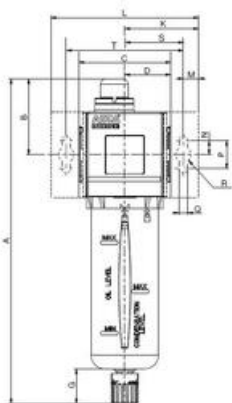

| A | B | C | D | E | F | G | H | J |
|-----|------|----|----|----|------|-----|-------|------|
| 233 | 54,4 | 66 | 30 | 69 | 34,5 | 25 | 50 | 1,9 |
| K | L | M | N | P | Q | R | S | T |
| 53 | 106 | 11 | 10 | 20 | 6,3 | 5,5 | 41,75 | 83,5 |

| A | B | C | D | E | F | G | H | J |
|-----|------|----|----|----|------|-----|-------|------|
| 233 | 54,4 | 66 | 30 | 69 | 34,5 | 25 | 50 | 1,9 |
| K | L | M | N | P | Q | R | S | T |
| 53 | 106 | 11 | 10 | 20 | 6,3 | 5,5 | 41,75 | 83,5 |