



# KOALESCENČNÍ FILTRY

Série 652

G652AFDP2JA00N

Koalescenní filter, 0,3 $\mu$ m, G1/4, polo-automat





- Připojení G1/4, G3/8, G1/2
- Průtok 800 až 870 l/min
- Filtrace 0,3 až 0,01  $\mu$ m
- Teplota 1,7 až 50°C
- Tlak max. 16 Bar



## POPIS PRODUKTU

## SPECIFIKACE

Procesní připojení	G1/4
Průtok max.	800 l/min

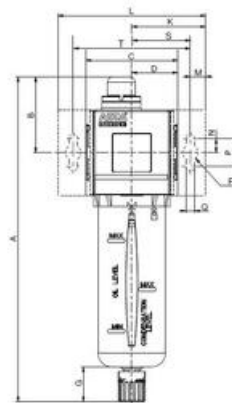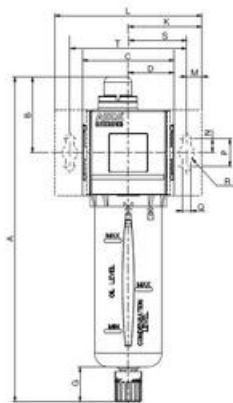

A	B	C	D	E	F	G	H	J
233	54,4	66	30	69	34,5	25	50	1,9
K	L	M	N	P	Q	R	S	T
53	106	11	10	20	6,3	5,5	41,75	83,5

A	B	C	D	E	F	G	H	J
233	54,4	66	30	69	34,5	25	50	1,9
K	L	M	N	P	Q	R	S	T
53	106	11	10	20	6,3	5,5	41,75	83,5