



DRIVER EM-241C

Série EM-241C

EM-241C
EM-241C 12-24VDC 15A



- 12-48 V DC
- Limit proudu (0,1-20 A)
- Regulace rychlosti
- Ramping
- Digitální nastavení parametrů





POPIS PRODUKTU

SPECIFIKACE

2053_Current limit (A)	0,1-25
2421_Peak current (A)	(5s) *30
Brake output	Ne
Change direction of rotation (CW/CCW)	Ano
Current limit adjustable	Ano
Current setting range	0.1-15 A
Currenttrip autoreveice	Ano
Forward/Reverse	Ano
Hmotnost	75 g
Impulse/continuous mode	Ano
Joystick analog input	Ne
Montáž	DIN lišta
Napájecí napětí	12 V DC, 24 V DC
Parallel driver four motors	Ne
Parallel driver two motors	Ne
Position with potentiometer	Ne
Positioning	Ne
Potentiometer adjustable speed	Ano
Provozní teplota	-40°C...+60°C

PWM frequency	2kHz/16kHz
RS485/Modbus	Ne
Softstart/stop	Ano
Speed settings	Ano
Speedregulator	Ano
Stop at limit position	Ano
Suitable engine	DC
Supplier	Electromen

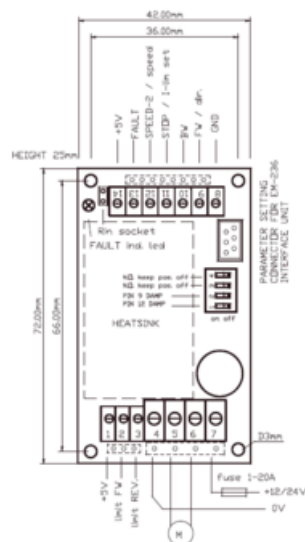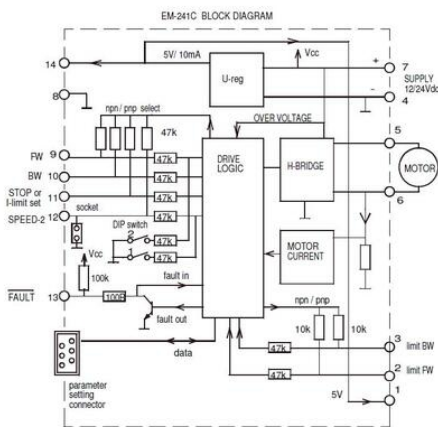

Molex connector options with dashed line
 3-pin molex 22-27-2031
 4-pin molex 10-08-5041
 7-pin molex 22-27-2071