Poptávka

FS80

FS80-CM0507C00W

- Rozlišení: 5–16 megapixelů
- Velikost pixelu: 3,2 µm
- Snímková frekvence: až 42 snímků za sekundu
- Integrované ostření a osvětlení
- Krytí IP: IP67



POPIS PRODUKTU

Pevný průmyslový snímač Zebra FS80 představuje špičkové řešení pro náročné aplikace sledování v logistice a výrobě, které vyžadují vysokou rychlost snímání, široké zorné pole a čtení na velkou vzdálenost. Je vybaven snímači s vysokým rozlišením, výkonným integrovaným osvětlením a je spravován pomocí intuitivní softwarové platformy Zebra Aurora Focus, která zjednodušuje nastavení, nasazení a provoz. Díky své robustní konstrukci (IP67), flexibilním možnostem připojení a sadě C-mount objektivů je FS80 navržen tak, aby optimalizoval produktivitu a nahradil několik standardních kamer, čímž snižuje náklady a složitost instalace.


Klíčové body:


- FS80 je navržen pro náročné sledovací a trasovací aplikace v logistice a výrobě.
- Díky snímačům s vysokým rozlišením a výkonnému osvětlení dokáže snímat rychle se pohybující kódy na velkou vzdálenost.
- Integrované multifunkční světlo (ZIML) je k dispozici v bílé, červené nebo infračervené variantě pro optimální čitelnost.
- Software Zebra Aurora Focus sjednocuje správu všech pevných průmyslových skenerů a zjednodušuje jejich nasazení.
- Odolné pouzdro s krytím IP67 a konektory M12 zajišťují spolehlivý provoz v náročných průmyslových podmínkách.
- Zařízení podporuje různé C-mount objektivy (8 mm až 35 mm) a doplňky jako polarizační filtry.
- Softwarové licence umožňují rozšíření funkcí, například pro rychlejší snímání nebo pokročilé OCR.
- Skener poskytuje vizuální i zvukovou zpětnou vazbu o stavu čtení, viditelnou i v hlučném prostředí.
- Podporuje širokou škálu komunikačních protokolů včetně TCP/IP, Ethernet/IP a PROFINET.
- Volitelný polarizační kryt zlepšuje čtení na reflexních površích nebo přes plastové fólie.


SPECIFIKACE

12415_Certification - Environment	EN IEC 63000:2018
12416_Certification - Electricity	UL, CSA, IEC 61010
12417_Certification - EMC	EN 55011, EN 61326, FCC Part 15
12418_Dimensions (with lens cap)	75 x 120 x 75 mm
12419_Dimensions (without lens cap)	75 x 57 x 75 mm
12420_Weight (with lens cap)	504 g
12421_Weight (without lens cap)	407 g
Focus	Manual iris

Frame Rate Max	42
Interface out	One M12 X-Coded 1GbE, One M12-A 12-pin (female) Power & GPIO, One M12-A 12-pin (male) VGA
Javascript Support	Ano
Lens Barrel	C-Mount
Materiál	Hliník
Pixel Size	3.2 x 3.2 µm
Size	75 x 120 x 75 mm
Software performance	DPM W/ Fast 2D Barcode Decoder W/ DL OCR
Storage	32 GB
Temperature range	0 °C till 45 °C
Type of scanner	Fixed Scanner

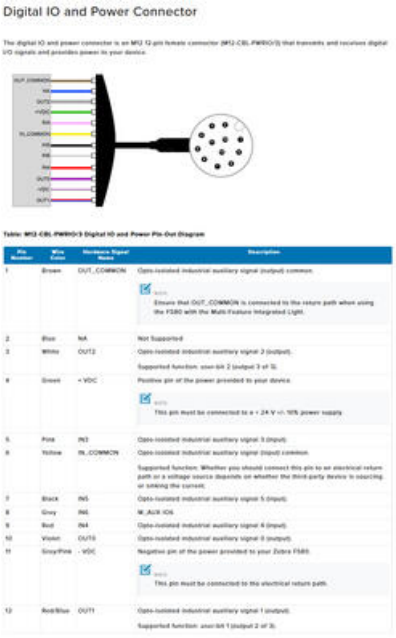

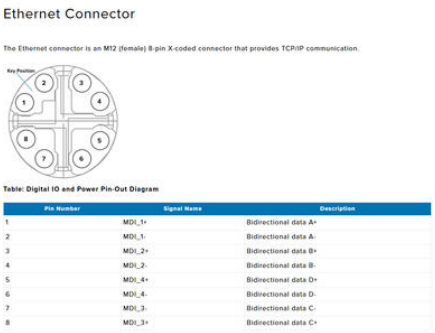

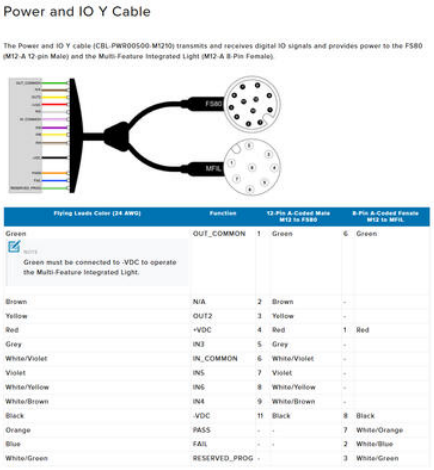

Digital IO and Power Connector

The digital IO and power connector is an M12 12-pin female connector (M12-CBL-PWRIO-3) that transmits and receives digital I/O signals and provides power to your device.




Table: M12-CBL-PWRIO-3 Digital IO and Power Pin-Out Diagram

Pin Number	Wire Color	Hardware Signal Name	Description
1	Brown	OUT_COMMON	Opto-isolated industrial auxiliary signal (output) common. NOTE Ensure that OUT_COMMON is connected to the return path when using the FS80 with the Multi-Feature Integrated Light.
2	Blue	NA	Not Supported
3	White	OUT2	Opto-isolated industrial auxiliary signal 2 (output). Supported function: user-bit 2 (output 3 of 3).
4	Green	+ VDC	Positive pin of the power provided to your device. NOTE This pin must be connected to a + 24 V +/- 10% power supply.
5	Pink	IN3	Opto-isolated industrial auxiliary signal 3 (input).
6	Yellow	IN_COMMON	Opto-isolated industrial auxiliary signal (input) common. Supported function: Whether you should connect this pin to an electrical return path or a voltage source depends on whether the third-party device is sourcing or sinking the current.
7	Black	IN5	Opto-isolated industrial auxiliary signal 5 (input).
8	Grey	IN6	W_AUX IO6
9	Red	IN4	Opto-isolated industrial auxiliary signal 4 (input).
10	Violet	OUT3	Opto-isolated industrial auxiliary signal 0 (output).
11	Grey/Pink	- VDC	Negative pin of the power provided to your Zebra FS80. NOTE This pin must be connected to the electrical return path.
12	Red/Blue	OUT1	Opto-isolated industrial auxiliary signal 1 (output). Supported function: user-bit 1 (output 2 of 3).

Ethernet Connector

The Ethernet connector is an M12 (female) 8-pin X-coded connector that provides TCP/IP communication.




Table: Digital IO and Power Pin-Out Diagram

Pin Number	Signal Name	Description
1	MDI_1+	Bidirectional data A+
2	MDI_1-	Bidirectional data A-
3	MDI_2+	Bidirectional data B+
4	MDI_2-	Bidirectional data B-
5	MDI_4+	Bidirectional data D+
6	MDI_4-	Bidirectional data D-
7	MDI_3-	Bidirectional data C-
8	MDI_3+	Bidirectional data C+

Power and IO Y Cable

The Power and IO Y cable (CBL-PWR00500-M1210) transmits and receives digital IO signals and provides power to the FS80 (M12-A 12-pin Male) and the Multi-Feature Integrated Light (M12-A 8-Pin Female).



Flying Leads Color (24 AWG)	Function	12-Pin A-Coded Male M12 to FS80		8-Pin A-Coded Female M12 to MFIL	
Green NOTE Green must be connected to -VDC to operate the Multi-Feature Integrated Light.	OUT_COMMON	1	Green	6	Green
Brown	N/A	2	Brown	-	
Yellow	OUT2	3	Yellow	-	
Red	+VDC	4	Red	1	Red
Grey	IN3	5	Grey	-	
White/Violet	IN_COMMON	6	White/Violet	-	
Violet	IN5	7	Violet	-	
White/Yellow	IN6	8	White/Yellow	-	
White/Brown	IN4	9	White/Brown	-	
Black	-VDC	11	Black	8	Black
Orange	PASS	-	-	7	White/Orange
Blue	FAIL	-	-	2	White/Blue
White/Green	RESERVED_PROG	-		3	White/Green