




2-4 PÓLOVÉ ROZVODOVÉ BLOKY

RPB1005

2pólová svorkovnice - RPB 125-14

- 40 A až 160 A.
- Samozhášivá izolační konstrukce UL 94-V0
- Izolace mezi fázemi
- Mosazné vodiče

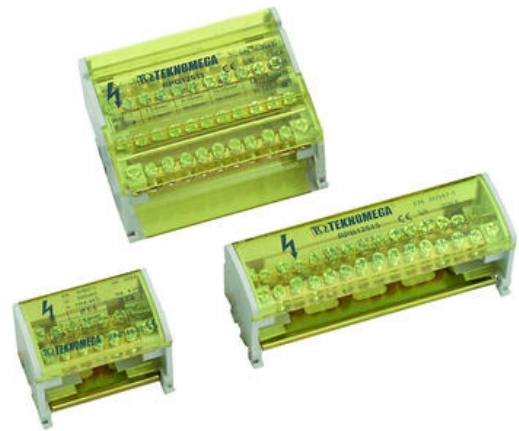

POPIS PRODUKTU

SPECIFIKACE

| | |
|---|--------------------|
| 3139_Output B: wire cross-section stranded, max. (mm ²) | 6 |
| Connections | 15 |
| Fix. Hole space | 112 mm |
| Height (H) | 46 mm |
| Input A: diameter | 9 mm |
| Input A: torque, max. | 3 |
| Input A: torque, min. | 2 |
| Input A: wire cross-section stranded, max. | 35 mm ² |
| Input A: wire cross-section stranded, min. | 10 mm ² |
| Input A: wire cross-section with wire-end ferrules, max. | 25 mm ² |
| Input A: wire cross-section with wire-end ferrules, min. | 10 mm ² |
| Length (L) | 132 mm |
| Nominal insulation voltage | 500 V |
| Nominální proud | 125 A |
| Number of inputs A | 1 |
| Number of outputs A | 1 |
| Number of outputs B | 11 |

| | |
|---|-------------------------|
| Number of outputs C | 2 |
| Output A: diameter | 9 mm |
| Output A: torque, max. | 3 |
| Output A: torque, min. | 2 |
| Output A: wire cross-section stranded with wire-end ferrules, max. | 25 mm ² |
| Output A: wire cross-section stranded with wire-end ferrules, min. | 10 mm ² |
| Output A: wire cross-section stranded, max. | 35 mm ² |
| Output A: wire cross-section stranded, min. | 10 mm ² |
| Output B: diameter | 5,5 mm |
| Output B: torque, max. | 3 |
| Output B: torque, min. | 2 |
| Output B: wire cross-section stranded with wire-end ferrules, max. | 6 mm ² |
| Output B: wire cross-section stranded with wire-end ferrules, min. | 1,5 mm ² |
| Output B: wire cross-section stranded, min. | 2,5 mm ² |
| Output C: diameter | 7,5 mm |
| Output C: torque, max. | 3 |
| Output C: torque, min. | 2 |
| Output C: wire cross-section stranded with wire-end ferrules, max. | 16 mm ² |
| Output C: wire cross-section stranded with wire-end ferrules, min. | 6 mm ² |
| Output C: wire cross-section stranded, max. | 25 mm ² |
| Output C: wire cross-section stranded, min. | 10 mm ² |
| Screw type | Galvanized steel screws |
| Short-circuit current resistance ICW over 1s | 4,2 kA |
| Short-circuit current resistance IPK (peak value) | 20 kA |
| Třída krytí | IP20 |
| Width (P) | 51 mm |

