



SNÍMAČE TEPLOTY TR10-D

Série TR10-D

TR10D-14343181

Snimač teploty PT100 3-trád -50-250°C 250x6mm JS bez závitu




- PT100, PT1000
- Teplota -196 až 500°C
- Připojení M, NPT
- Média voda, plyny, oleje
- ATEX, IECEx

POPIS PRODUKTU

SPECIFIKACE

Insertion length	250 mm
Materiál kontaktní části	Nerez ocel 316Ti
Materiál těla	Hliník
Plug diameter	6 mm
Přesnost klasifikace	Třída B
Provozní teplota max.	250 °C
Provozní teplota min.	-50 °C
Teplota okolí do	80 °C
Teplota okolí od	-40 °C
Třída krytí	IP65

Electrical connection

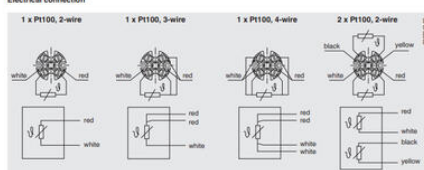


For the electrical connections of built-in temperature transmitters see the corresponding data sheets or operating instructions.




Model	Material	Cable entry thread size	Ingress protection (class I)	Cap	Surface	Connection to neck tube
JS	Aluminum	M18 x 1,5 H	IP65	Cover with 2 screws	Blue, lacquered H	M24 x 1,5, 1/2 NPT

Model	Explosion protection	Ex i (gas) Zone 0, 1, 2	Ex i (dust) Zone 00, 2, 1
JS	Without	x	x


Components model TR10-D

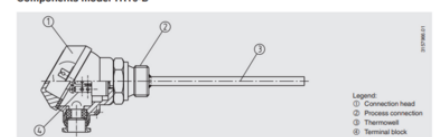

Dimensions in mm

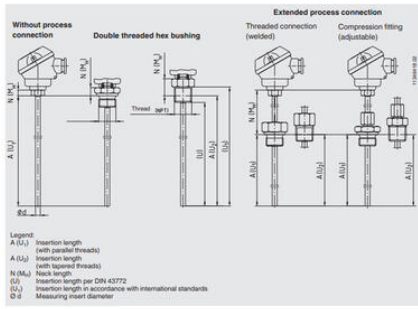

Electrical connection

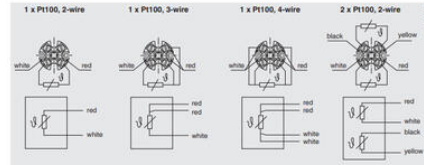


For the electrical connections of built-in temperature transmitters see the corresponding data sheets or operating instructions.



Model	Material	Cable entry thread size	Ingress protection (IP)	Cap	Surface	Connection to track cable
J5	Aluminum	M16 x 1.5-11	IP65	Cover with 2 screws	Blk. lacquered	M24 x 1.5, 1/2 NPT

Model	Explosion protection	
	Without	Ex I (gas) Zone 0, 1, 2
J5	x	x

Components model TR10-D

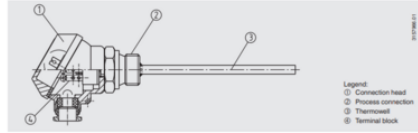

Dimensions in mm

