Poptávka

SNÍMAČE TEPLOTY TR33

Série TR33

TR33-14226913
Snimac teploty M12x1 -30-150°C PT100 2-tråd G1/2
150x6mm



- Výstup 4-20mA
- Teplota -30 až 250°C
- Připojení G, NPT
- Média voda, plyny, oleje


POPIS PRODUKTU

SPECIFIKACE


Insertion length	150 mm
Materiál	Nerez ocel
Měřící signál	PT100
Napájecí napětí DC max.	30 V DC
Napájecí napětí DC min.	10 V DC
Plug diameter	6 mm
Přesnost klasifikace	Třída A
Připojení	G1/2
Teplota média max.	150 °C
Teplota média min.	-30 °C
Teplota okolí do	85 °C
Teplota okolí od	-50 °C
Tlakový rozsah max.	270 bar
Třída krytí	IP67

Dimensions in mm

Process connection with tapered threads

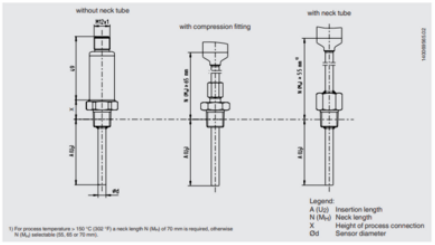


Process connection with parallel threads (or without process connection)

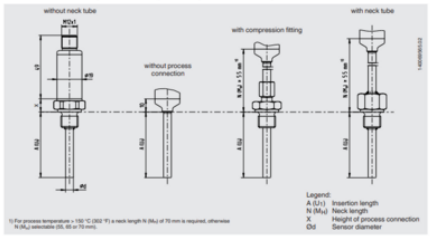

Configuration software WIKAsoft-TT




Connecting PU-548 programming unit

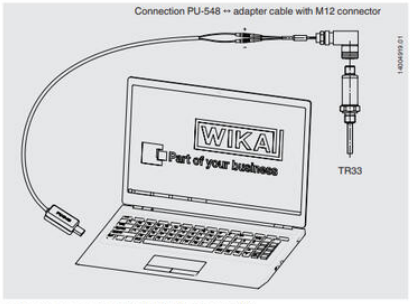

(predecessor, programming unit model PU-448, also compatible)

Electrical connection

Output signal 4 ... 20 mA
M12 x 1, 4-pin circular connector




Pin	Signal	Description
1	L+	10 ... 30 V
2	VQ	not connected
3	L-	0 V
4	C	not connected

Output signal Pt100 or Pt1000 sensor
M12 x 1, 4-pin circular connector




Dimensions in mm

Process connection with tapered threads

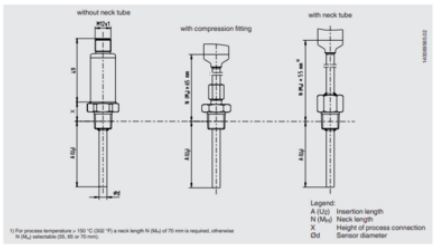


Process connection with parallel threads (or without process connection)

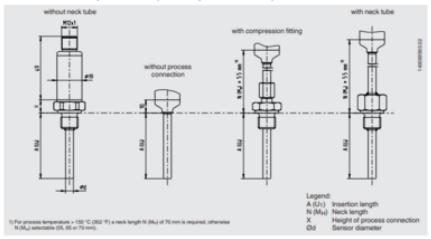

Configuration software WIKAsoft-TT




Connecting PU-548 programming unit

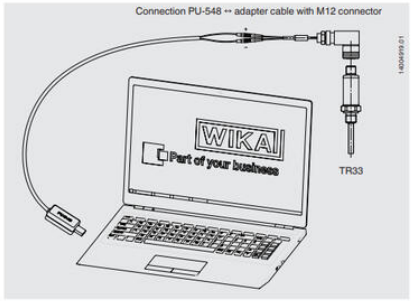

(predecessor, programming unit model PU-448, also compatible)

Electrical connection

Output signal 4 ... 20 mA
M12 x 1, 4-pin circular connector



Pin	Signal	Description
1	L+	10 ... 30 V
2	VQ	not connected
3	L-	0 V
4	C	not connected

Output signal Pt100 or Pt1000 sensor
M12 x 1, 4-pin circular connector

