



# TERMOČLÁNKY TR95

Série TR95

TR95

Termočlánek





- Teplota -196°C až 600°C
- PT100
- Tělo nerez, speciální materiály
- ATEX, IECEx, GOST




## POPIS PRODUKTU

## SPECIFIKACE


<b>Materiál</b>	Nerez ocel 316L, Nerez ocel 316Ti
<b>Materiál kontaktní části</b>	Slitina
<b>Shoda s normami</b>	NAMUR, Ex-ia

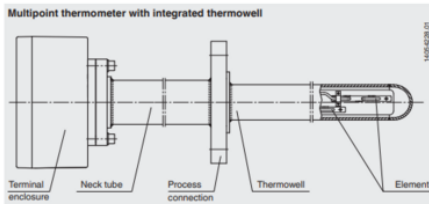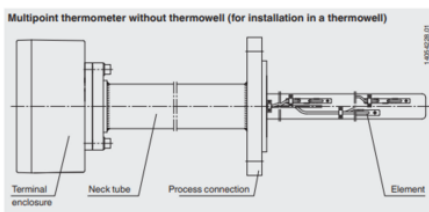







### ■ Thermowell (option)

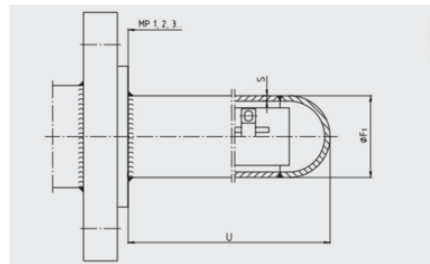

### ■ Element (flat-steel band design with spring elements)

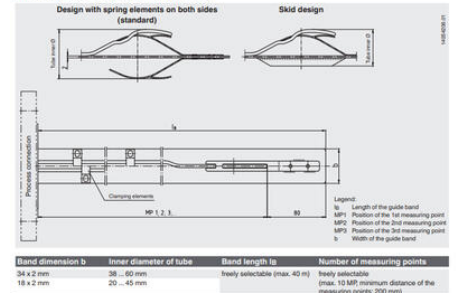


■ Neck tube

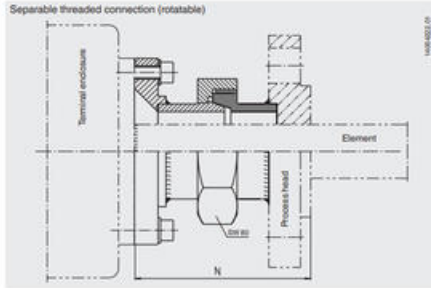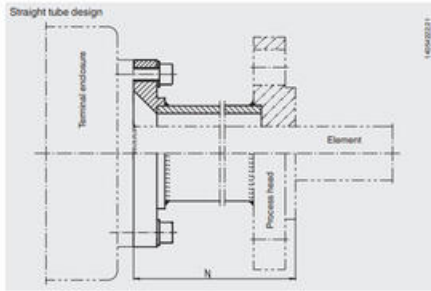


The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	ca. 160 x 160	ca. 160 x 260	ca. 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 8 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP


■ Multipoint thermometer without thermowell (for installation in a thermowell)

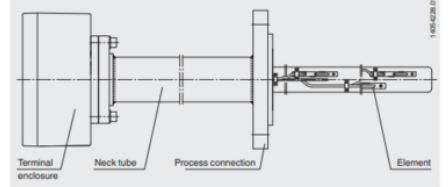


■ Multipoint thermometer with integrated thermowell

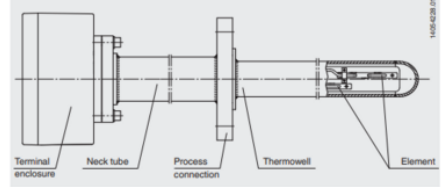


■ Thermowell (option)

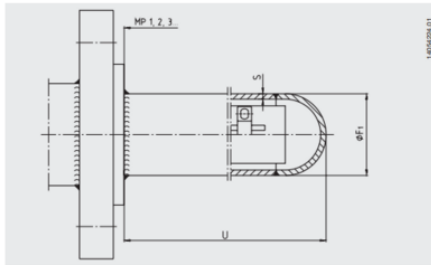






■ Element (flat steel band design with spring elements)

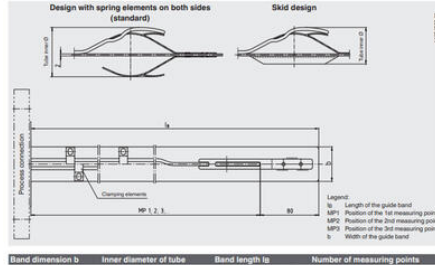

■ Neck tube

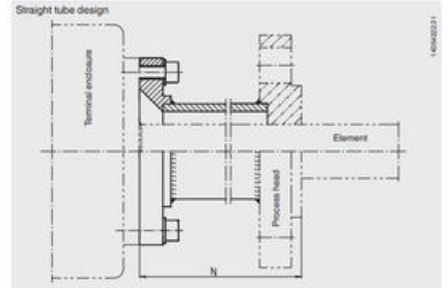

■ Separable threaded connection (rotatable)

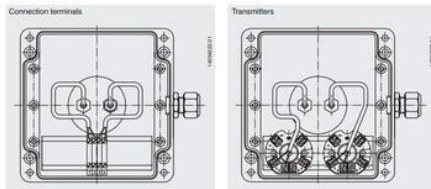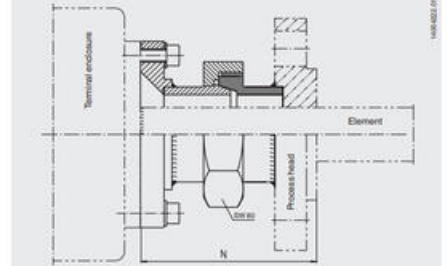

The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	ca. 160 x 160	ca. 160 x 260	ca. 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 8 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP