Poptávka

TERMOČLÁNKY TC53

Série TC53

TC53-14371851
Termočlánek Type K 0-1260°C 10x6mm L=3m PTFE




- Teplota -40°C až 1200°C
- K, J, E, N, T
- Kabel PVC, Silicon, PTFE, Sklenné vlákno
- ATEX, IECEx, GOST


POPIS PRODUKTU

SPECIFIKACE

Délka kabelu	3000 mm
Insertion length	10 mm
Materiál kabelu	PTFE
Materiál kontaktní části	Nerez ocel 316Ti
Materials Panic Ring	Mosaz
Plug diameter	6 mm
Provozní teplota max.	1260 °C
Provozní teplota min.	0 °C
Temperature resistance of cable from	-50 °C
Temperature resistance of cable to	250 °C

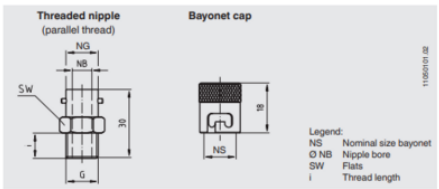


Bayonet cap fixed to the end of the spring (sheathed cable design)

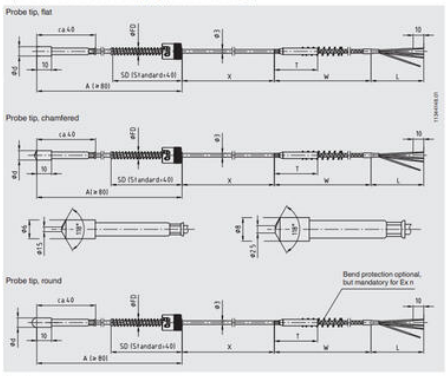


Legend:
Ø d Probe diameter
L Probe length
W Cable length
Ø FD Spring diameter
A Insertion length
X Probe extension
T Transition sleeve
SD Spring length

Bayonet cap adjustable on the spring (sheathed cable design)

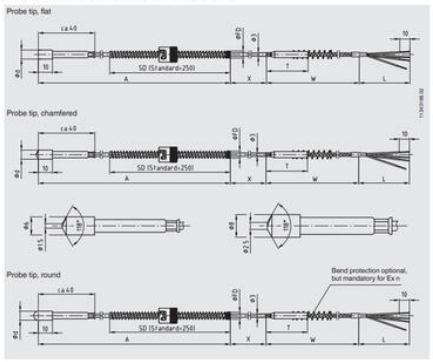


Legend:
Ø d Probe diameter
L Probe length
W Cable length
Ø FD Spring diameter
A Insertion length
X Probe extension
T Transition sleeve
SD Spring length


Bayonet cap adjustable on the spring (cable through to the probe tip)

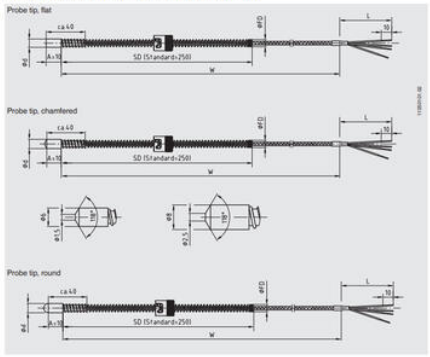

Legend:
Ø d Probe diameter
L Probe length
W Cable length
Ø FD Spring diameter
A Insertion length
X Probe extension
T Transition sleeve
SD Spring length

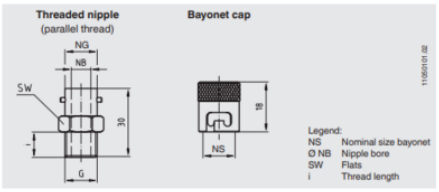


Bayonet cap fixed to the end of the spring (sheathed cable design)

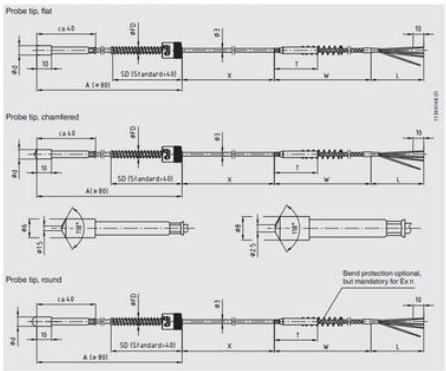


Legend:
Ø d Probe diameter
L Probe length
W Cable length
Ø FD Spring diameter
A Insertion length
X Probe extension
T Transition sleeve
SD Spring length

Bayonet cap adjustable on the spring (sheathed cable design)

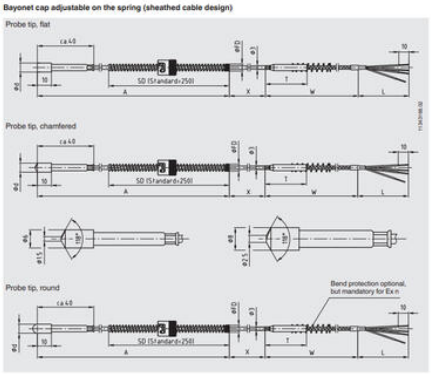

Legend:
Ø d Probe diameter
L Probe length
W Cable length
Ø FD Spring diameter
A Insertion length
X Probe extension
T Transition sleeve
SD Spring length

Bayonet cap adjustable on the spring (cable through to the probe tip)

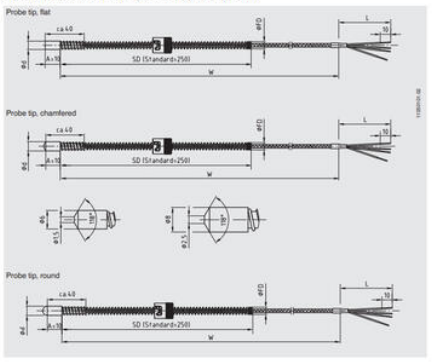

Legend:
Ø d Probe diameter
L Probe length
W Cable length
Ø FD Spring diameter
A Insertion length
X Probe extension
T Transition sleeve
SD Spring length