



TERMOČLÁNKY TC59-W

Série TC59-W



TC59-W

Termočlánek WELD-PAD

- Teplota 0°C až 1260°C
- K, J, E, N
- Tělo nerez, speciální materiály
- ATEX, IECEX, GOST



POPIS PRODUKTU


SPECIFIKACE

Materiál kontaktní části	Hastelloy, Nerez ocel
---------------------------------	-----------------------

Provozní teplota max.	1260 °C
------------------------------	---------


Provozní teplota min.	0 °C
------------------------------	------

Fixed connection (compression fitting) to the furnace

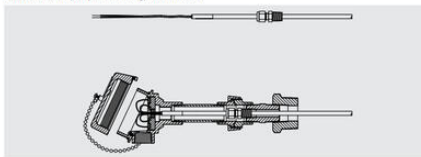


- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting. It can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely.

Sliding connection (piston/spring) to the furnace

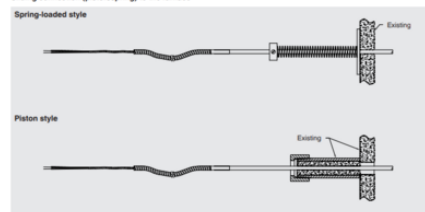

Fixed connection (compression fitting) to the furnace

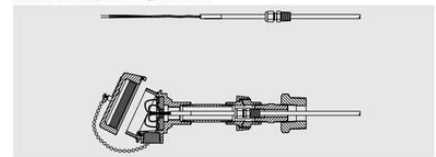

- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting. It can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely.

Sliding connection (piston/spring) to the furnace

