SIGNÁLNÍ SLOUP

MT60

MT60-F100-24V DC
MT60 na sloupku 100mm, 24 VDC



- Plug & Play sloupek
- Vynikající rozložení světla
- Průhledná čočka
- Čištění i proudem vody (IP66)
- Pevně dané, oddělené barvy

POPIS PRODUKTU

Základní, cenově výhodný, monolitický signální sloupek MT60 je navržen s ohledem na jednoduchost při zachování estetických požadavků na signální věž. Tento sloupek se dodává předem smontovaný a je okamžitě připraven k použití - stačí vybalit a zapojit. Barevné LED sloupky MT60 jsou při aktivitě jasné a vzájemně zcela rozlišitelné, aby poskytovaly jasnou signalizaci.

SPECIFIKACE

Barva	Bílá
Barva těla	Bílá
Napájecí napětí	24 V
Nominal current	3 mA
Provozní teplota max.	50 °C
Provozní teplota min.	-25 °C
Průměr	61 mm
Třída krytí	IP66
Třída NS	7
Výška	291 mm

INPUT

M12 Male Connector PIN	Terminal block / Input	MT60-F100-... MT60-W-...	MT60-M12-24V DC	MT60-M12-S-24V DC
3	0	common	common	common
4	1	green steady	green steady	green steady
1	2	yellow steady	yellow steady	yellow steady
2	3	red steady	red steady	red steady
5	4	red blinking	red blinking	tone pulsing
	5	tone pulsing (optional)	-	-

MT60 Dimension Drawing

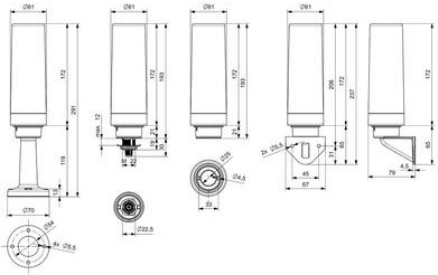

INPUT

M12 Male Connector PIN	Terminal block / Input	MT60-F100-... MT60-W-...	MT60-M12-24V DC	MT60-M12-S-24V DC
3	0	common	common	common
4	1	green steady	green steady	green steady
1	2	yellow steady	yellow steady	yellow steady
2	3	red steady	red steady	red steady
5	4	red blinking	red blinking	tone pulsing
	5	tone pulsing (optional)	-	-

MT60 Dimension Drawing

