



KOMBINOVANÁ SIRÉNA S BLIKAČEM, Ø93 MM

Série CS1

C111621005

CS1 siréna/záblesk LED oranžová 24V

- Rychlá instalace díky systému bajonetových zámků
- Výběr z 32 tónů
- Akustická intenzita 86 – 106 dB
- Krytí IP 65




POPIS PRODUKTU

Sirény pro vnitřní i venkovní použití (IP 65), druh tónu je volitelný DIP-přepínači uvnitř. Oba typy lze objednat v bílé a červené barvě.

SPECIFIKACE



Barva	Oranžová
Barva těla	Červená
Druh montáže	Horizontální, Vertikální
Frekvence blikání	1 Hz
Frekvence max.	2900 Hz
Frekvence min.	440 Hz
Hladina zvuku max.	109 dB
Hladina zvuku min.	88 dB
Hmotnost	258 g
Jmenovitý proud max.	0,041 A
Jmenovitý proud min.	0,014 A
Napájecí napětí	24 V
Napájecí napětí AC/DC max.	35 V
Napájecí napětí AC/DC min.	18 V
Ovládání zvuku	Ano

Počet tónů	32 ks
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Třída krytí	IP65
Typ zdroje	Oranžová LED
Zdroj světla	LED

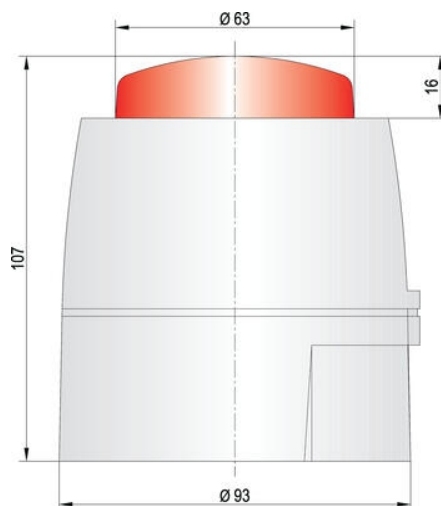

Tontabelle / Tone table

No.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	LF Siren	800 Hz on 0.5 sec	11111	800 count
2	Overload siren BS standard	920 Hz on 2s	11111	800 count
3	Warning Tone BS standard	800/1000 Hz on 0.5 sec	11101	800 count
4	Overload siren BS standard	1000/200 Hz on 2s	11100	800 count
5	LF Back up siren	800 Hz on 0.5 sec on/off	11011	800 count
6	LF Back up alarm	800 Hz on 1.0 sec on/off	11010	800 count
7	LF Back up siren and tone	800 Hz on 1.0 sec on/off	11001	800 count
8	LF Chirp siren BS BS02	800 Hz count	11000	Same tone
9	Swedish tone 1190	800/200 Hz on 1 Hz	10111	800 count
10	Australian slow whoop	Intermittent 970 Hz 0.25 sec on/0.25 sec off	10110	3.75 sec on 0.25 sec off 800/200
11	Dutch sweep tone	970 Hz count	10101	800 count 0.5 sec on/off 0.5 sec on/off
12	Overload siren BS	1000/200 Hz on 2s	10100	800 count
13	Overload tone BS	800/200 Hz on 2s	10011	800 count
14	Alarm LF also siren	800/200 Hz on 2s	10010	800 count
15	Test LF siren	800/200 Hz on 2s	10001	800 count
16	US Temporal Pattern LF	250 Hz for 0.5 sec on 0.5 sec off	10000	800 count
17	Intermittent tone BS standard	Intermittent tone 800 Hz on 0.5 sec on/off	01111	800 count
18	BS BS01 LF BS02 BS1 BS2	Intermittent 970 Hz 0.25 sec on/0.25 sec off	01110	Same tone
19	Intermittent tone BS	1000 Hz on 0.5 sec on/off	01101	800 count
20	BS BS01 LF	Intermittent 200 Hz 100 ms on 400 ms off	01100	Same tone
21	Continuous tone	1000 Hz continuous	01011	Same tone
22	LF Siren	800/200 Hz on 1 Hz	01010	800 count
23	LF Chirp siren	800 Hz	01001	800 count
24	Overload tone BS	800/200 Hz on 2s	01000	800 count
25	German LF tone	Intermittent 660 Hz 160 ms on / 168 ms off	00111	800 count
26	Swedish tone BS	Intermittent 660 Hz 160 ms on / 168 ms off	00110	Same tone
27	French tone BS BS01	1000 Hz for 100 ms and 1000 Hz for 100 ms	00100	800 count
28	Overload LF also siren	Intermittent 200 Hz	00101	Same tone
29	US Temporal Pattern LF	250 Hz for 0.5 sec on 0.5 sec off	00011	800 count
30	Siren 2 tone ramp 1/short	800/200 Hz rising then falling @ 25 Hz	00010	800 count
31	PP BS01 - 1 tone	Intermittent tone 800/200 Hz on 2s	00000	800 count
32	Siren 2 tone ramp 1/long	800/200 Hz 3 sec rising / 3 sec falling	00001	800 count

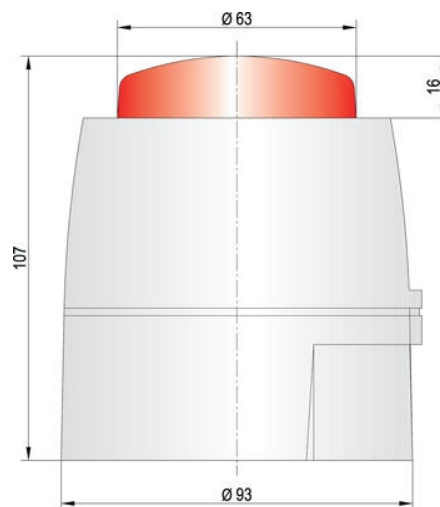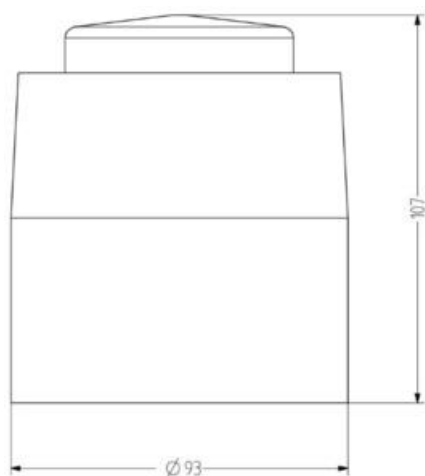

Nr.	Sound	Tone frequency	DR switch	2nd stage alarm (Hz)
1	1-F Buzzer	800 - 1000Hz at 0.5 sec	111111	800 cont
2	Alarm tone with 1st stage	800/600Hz at 2Hz	111110	800 cont
3	Warning tone 1st stage	800/1000Hz at 0.5 sec	111101	800 cont
4	Alarm tone with 2nd stage	800/600Hz at 2Hz	111100	800 cont
5	1-F Buzzer at interrupted tone	800Hz at 1.0 sec on/off	110111	800 cont
6	1-F Buzzer alarm	800Hz at 1.0 sec on/off	110110	800 cont
7	1-F Buzzer at interrupted tone - tone	800Hz at 1.0 sec on/off	110011	800 cont
8	1-F Continuous tone 800Hz	800Hz cont	110010	800 tone
9	Alarm tone 11th	800/600Hz at 1Hz	101111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	101110	800/1000 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	101011	0.5 sec on 0.5 sec off
12	Alarm tone 2nd stage	800/600Hz at 2Hz	101010	800 cont
13	Alarm tone 2nd	800/600Hz at 2Hz	100111	800 cont
14	Alarm tone 1-F alarm tone	800/600Hz at 2Hz	100110	800 cont
15	1-F Buzzer alarm	800/600Hz at 2Hz	100011	800 cont
16	US Temporal Pattern 1-F	800Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	100010	800 cont
17	Interrupted tone 800Hz	Interrupted tone 800Hz at 0.5 sec on/off	011111	800 cont
18	800/800 1-F 800/800 2nd 1-F	Intermittent 970Hz 500ms on/500ms off	011110	800 tone
19	Alarm tone 2nd stage	800Hz at 1.0 sec on/off	011101	800 cont
20	800/800 1-F	Intermittent 970Hz 500ms on/500ms off	011100	800 tone
21	Continuous tone	1020Hz continuous	010111	800 tone
22	1-F Buzzer	800/600Hz on/off at 1.0Hz	010110	800 cont
23	1-F Continuous	800Hz	010011	800 cont
24	Alarm tone 2nd	800/600Hz at 2Hz	010010	800 cont
25	German 1-F tone	800Hz at 1.0 sec on/off	001111	800 cont
26	Swedish 1-F tone	Intermittent 650Hz 150 ms on / 500 ms off	001110	800 tone
27	French tone at 800	800Hz for 1.0 sec and repeat 500ms	001101	800 cont
28	Swedish 1-F tone	Intermittent 650Hz	001100	800 tone
29	US Temporal Pattern 1-F	800Hz for 0.5 sec on 0.5 sec off off for 1.5 sec then repeat	000111	800 cont
30	Alarm 2 stage alarm 1-F	800/600Hz on/off then 1.0 sec on/0.5 sec off	000110	800 cont
31	1-F 1000 1-F tone	Intermittent tone 800/600Hz 1Hz on	000101	800 cont
32	Alarm 2 stage alarm 2-F	800/600Hz 0.5 sec on/off / 3 sec hold	000100	800 cont

