



KOMBINOVANÁ SIRÉNA S BLIKAČEM, Ø93 MM

Série CS1

C111221005

CS1 siréna/záblesk LED oranžová 24V

- Rychlá instalace díky systému bajonetových zámků
- Výběr z 32 tónů
- Akustická intenzita 86 – 106 dB
- Krytí IP 65




POPIS PRODUKTU

Sirény pro vnitřní i venkovní použití (IP 65), druh tónu je volitelný DIP-přepínači uvnitř. Oba typy lze objednat v bílé a červené barvě.

SPECIFIKACE




Barva	Oranžová
Barva těla	Bílá
Druh montáže	Horizontální, Vertikální
Frekvence blikání	1 Hz
Frekvence max.	2900 Hz
Frekvence min.	440 Hz
Hladina zvuku max.	109 dB
Hladina zvuku min.	88 dB
Hmotnost	258 g
Jmenovitý proud max.	0,041 A
Jmenovitý proud min.	0,014 A
Napájecí napětí	24 V
Napájecí napětí AC/DC max.	35 V
Napájecí napětí AC/DC min.	18 V
Ovládání zvuku	Ano

Počet tónů	32 ks
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Třída krytí	IP65
Typ zdroje	Oranžová LED
Zdroj světla	LED

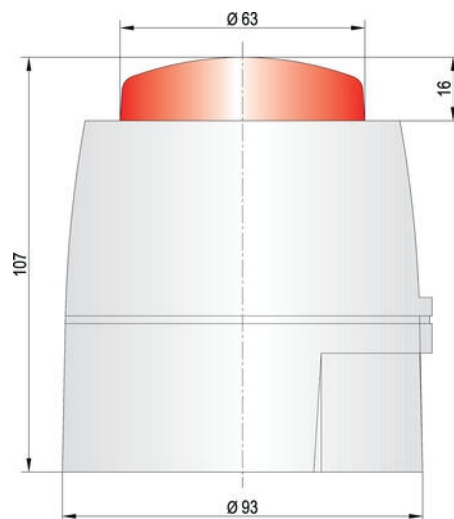

Tontabelle / Tone table

No.	Sound	Tone frequency	OP-switch	2nd stage alarm (Hz)
1	LF Sweep	800-1000Hz at 0.5sec	11111	800cont
2	Alarm tone (LF) standard	800/200Hz at 2Hz	111110	800cont
3	Warning tone (LF) standard	800/100Hz at 0.5sec	11110	800cont
4	Alarm tone (LF) extended	800/200Hz at 2Hz	111100	800cont
5	LF Back up when needed tone	800Hz at 1.5sec on/off	11011	200cont
6	LF Back up when	800Hz at 1.5sec on/off	11010	800cont
7	LF Back up when needed tone - test	800Hz at 1.5sec on/off	11001	800cont
8	LF Chirp tone (LF) 1000Hz	1000Hz cont	11000	Some tone
9	Siren tone (LF)	800/200Hz at 1Hz	10111	800cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	3.75 sec on 0.75 sec off 3.5 sec on 0.5 sec off
11	Dutch sweep tone	970Hz cont	10101	3.5 sec on 0.5 sec off
12	Emergency response tone	500/600Hz at 2Hz	10100	800cont
13	Siren tone (HF)	800/200Hz at 2Hz	10011	800cont
14	Alarm tone (HF) slow response	800/200Hz at 2Hz	10010	200cont
15	Fast HF siren	800/200Hz at 7Hz	10001	200cont
16	US Temporal Pattern LF	800Hz for 0.5 sec on/0.5 sec off x3 then 1.5 sec then repeat	10000	800 cont
17	Intermittent tone (LF) standard	Intermittent tone 800Hz at 0.5 sec on/off	01111	800 cont
18	ISO 8201 (LF) 800/200 Hz 1.5 Hz	Intermittent 970Hz 600ms on/300ms off	01110	Some tone
19	Intermittent tone (LF) extended	Intermittent 800Hz at 0.5 sec on/off	01101	800cont
20	ISO 8201 HF	Intermittent 970Hz 100ms on/300ms off	01100	Some tone
21	Chirp tone (LF)	1000Hz continuous	01011	Some tone
22	LF Buzzer	800/200Hz burst at 1Hz	01010	800cont
23	LF Chirp tone	800Hz	01001	200cont
24	Siren tone (HF)	800/200Hz at 2Hz	01000	800cont
25	Emergency tone	Sweep 500/1000Hz at 1Hz	00111	800cont
26	Standard Fire alarm	Intermittent 660Hz 800ms on / 150ms off	00110	Some tone
27	French tone (LF)	800Hz for 100ms and 1400Hz 1000ms	00100	800 cont
28	Standard fire alarm	Chirp tone 800Hz	00101	Some tone
29	US Temporal Pattern HF	800Hz for 0.5 sec on 0.5 off x3 off for 1.5 sec then repeat	00011	2000 cont
30	Siren 2 stage ramp (short)	600/200Hz rising then falling 0.75 sec	00010	800 cont
31	LF Buzzer 1 - 100ms	Intermittent tone 800/200 Hz at 1Hz	00001	800 cont
32	Siren 2 stage ramp (long)	600/200Hz 3 sec rising / 3 sec falling	00000	800 cont

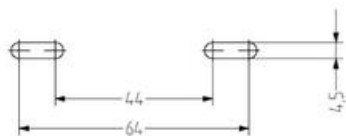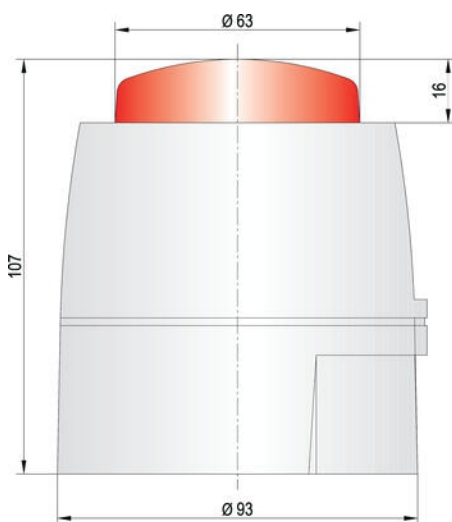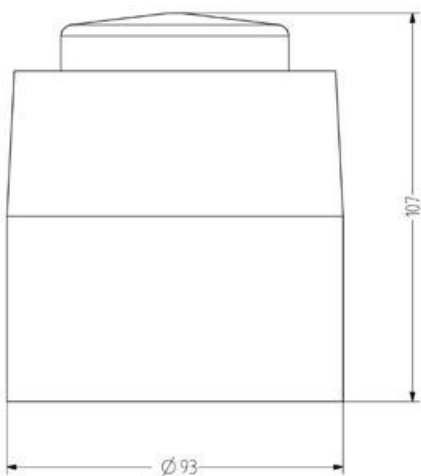

No.	Sound	Tone frequency	OP switch	2nd stage alarm [Hz]
1	IE Sweep	800-1000Hz @ 0.5sec	11111	800count
2	Alarm tone (S1) (stacked)	800/900Hz @ 2Hz	11110	800count
3	Heads tone (S1) (stacked)	800/1000Hz @ 0.5sec	11100	800count
4	Alarm tone (S2) (stacked)	500/600Hz @ 2Hz	11100	800count
5	IE Back up (stacked) tone	800Hz @ 1.5sec on/off	11011	2000count
6	IE Back up (S1)	800Hz @ 1.5sec on/off	11010	800count
7	IE Back up (stacked) tone - test	800Hz @ 1.5sec on/off	11001	800count
8	IE Check tone (S1) (S2)	800Hz on/off	11000	Some tone
9	Swamp tone (S1)	800/900Hz @ 1Hz	10111	800count
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	800/2000 3.25 sec on 0.25 sec off
11	Dutch sweep tone	970Hz cont	10101	800count 3.5 sec on
12	Andean sweep tone	800/900Hz @ 2Hz	10100	0.5 sec on/off
13	Swamp tone (S1)	800/900Hz @ 2Hz	10011	800count
14	Swamp HF (S1) (S2)	800/900Hz @ 2Hz	10010	200count
15	Fast HF sweep	800/900Hz @ 7Hz	10001	200count
16	US Temporal Pattern LF	800Hz for 0.5 sec on/0.5 sec off/3.5 sec 1.5 sec then repeat	10000	800 count
17	Intermittent tone (S1) (stacked)	Intermittent tone 800Hz @ 0.5 sec on/off	01111	800 count
18	ISO 9001 IE (S1) (S2) (S3) (S4) (S5)	Intermittent 970Hz 0.625ms on/0.625ms off	01110	Some tone
19	Intermittent tone (stacked)	800Hz @ 0.25 sec on/off	01101	800count
20	ISO 9001 IE	Intermittent 970Hz 0.625ms on/0.625ms off	01100	Some tone
21	Check tone	1000Hz continuous	01011	Some tone
22	IE Flyer	800/900Hz sweep @ 11Hz	01010	800count
23	IE Check tone	800Hz	01001	200count
24	Swamp tone (S1)	800/900Hz @ 2Hz	01000	800count
25	Temp (S1) tone	Swamp 1000/1000Hz @ 1Hz	00111	800count
26	Swamp (S1) Flyer tone	Intermittent 800Hz 0.5 sec on / 1.5 sec off	00110	Some tone
27	French tone (S1) (S2)	800Hz for 800 ms and 1400Hz for 600ms	00100	800 count
28	Swamp (S1) Flyer on/off	Continuous 800Hz	00100	Some tone
29	US Temporal Pattern HF	800Hz for 0.5 sec on 0.5 off/3.5 sec 1.5 sec then repeat	00011	2900 count
30	Swamp 2 (S1) (S2) (S3) (S4) (S5)	800/900Hz @ 1.5 sec on/off	00010	800 count
31	IE Flyer 1 - Tail tone	Intermittent tone 800/900 Hz @ 2Hz	00000	800 count
32	Swamp 2 (S1) (S2) (S3) (S4) (S5)	800/900Hz @ 1.5 sec on/off	00000	800 count

