KOMBINOVANÁ SIRÉNA S BLIKAČEM, Ø93 MM

Série CS1

C111221005
CS1 siréna/záblesk LED oranžová 24V



- Rychlá instalace díky systému bajonetových zámků
- Výběr z 32 tónů
- Akustická intenzita 86 – 106 dB
- Krytí IP 65

POPIS PRODUKTU


Sirény pro vnitřní i venkovní použití (IP 65), druh tónu je volitelný DIP-přepínači uvnitř. Oba typy lze objednat v bílé a červené barvě.

SPECIFIKACE

Barva	Oranžová
Barva těla	Bílá
Druh montáže	Horizontální, Vertikální
Frekvence blikání	1 Hz
Frekvence max.	2900 Hz
Frekvence min.	440 Hz
Hladina zvuku max.	109 dB
Hladina zvuku min.	88 dB
Hmotnost	258 g
Jmenovitý proud max.	0,041 A
Jmenovitý proud min.	0,014 A
Napájecí napětí	24 V
Napájecí napětí AC/DC max.	35 V
Napájecí napětí AC/DC min.	18 V
Ovládání zvuku	Ano


Počet tónů	32 ks
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Třída krytí	IP65
Typ zdroje	Oranžová LED
Zdroj světla	LED



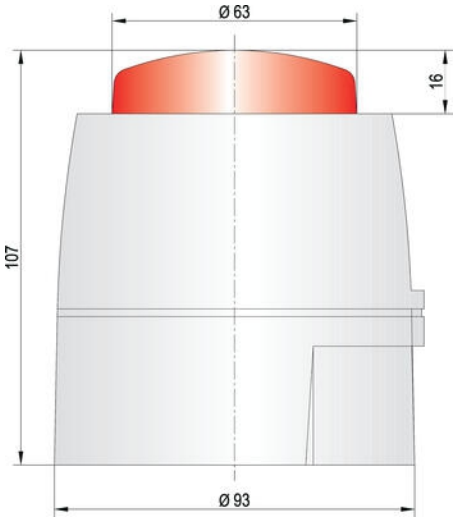



Tontabelle / Tone table

Nr.	Sound	Tone frequency	DIP-switch	2nd stage alarm (Hz)
1	LF Sweep	800 - 1000Hz @ 0.5 sec	1 1 1 1 1	800 cont
2	Alternative wail/ie BS standard	800/960Hz @ 2Hz	1 1 1 1 0	800 cont
3	Wail/ie Tone BS standard	800/1000Hz @ 0.5 sec	1 1 1 0 1	800 cont
4	Alternative wail/ie BS standard	800/1000Hz @ 2Hz	1 1 1 0 0	800 cont
5	HF Back up interrupted tone	2800Hz @ 1.0 sec on/off	1 1 0 1 1	2800 cont
6	LF Back up Alarm	800Hz @ 180 msec on/off	1 1 0 1 0	800 cont
7	HF Back up interrupted tone - fast	2800Hz @ 180 msec on/off	1 1 0 0 1	800 cont
8	LF Continuous tone BS5839	800 Hz cont	1 1 0 0 0	Same tone
9	Sweep tone (1Hz)	800/900Hz @ 1Hz	1 0 1 1 1	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	1 0 1 1 0	500-1200 3.75 sec on 0.25 sec off
11	Dutch sweep tone	970Hz cont	1 0 1 0 1	500-1200 3.5 sec on 0.5 sec off
12	Analogue sweep tone	800/600Hz @ 2Hz	1 0 1 0 0	800 cont
13	Sweep tone (3Hz)	800/970Hz @ 3Hz	1 0 0 1 1	800 cont
14	Alternate HF slow sweep	2800/2900Hz @ 3Hz	1 0 0 1 0	2400 cont
15	Fast HF sweep	2400-2800Hz @ 7Hz	1 0 0 0 1	2400 cont
16	US Temporal Pattern LF	0.5kHz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	1 0 0 0 0	800 cont
17	Interrupted tone BS stat/dar	Interrupted tne 800Hz @ 0.5 sec on/of	0 1 1 1 1	800 cont
18	ISO 8201 LF BS5839 Pt 1 1988	Intermittent 970Hz 500ms on/500ms of	0 1 1 1 0	Same tone
19	Interrupted tone medium	1000Hz @ 0.25 sec on/off	0 1 1 0 1	800 cont
20	ISO8201 HF	Intermittent 970Hz 1500 ms on 500 ms off	0 1 1 0 0	Same tone
21	Continuous tone	1000Hz continuous	0 1 0 1 1	Same tone
22	LF Buzz	800-950Hz swept @ 110Hz	0 1 0 1 0	800 cont
23	HF Continuous	2800Hz	0 1 0 0 1	2800 cont
24	Sweep tone (1Hz)	800-970Hz @ 1Hz	0 1 0 0 0	800 cont
25	German DIN tone	Sweep 1200-1500Hz @ 1Hz	0 0 1 1 1	800 cont
26	Swedish Fire signal	Intermittent 660Hz 150 ms on / 150 ms of	0 0 1 1 0	Same tone
27	French tone AFNOR	554kHz for 100 ms and 440Hz for 400m	0 0 1 0 1	800 cont
28	Swedish all clear signal	Continuous 660Hz	0 0 1 0 0	Same tone
29	US Temporal Pattern HF	2500Hz for 0.5 sec on 0.5 off x3, off for 1.5 sec then repeats	0 0 0 1 1	2900 cont
30	Siren 2 way ramp (short	500/1200Hz rising then falling @ 25 se	0 0 0 1 0	800 cont
31	P.P 1063.1 - Telecom	Alternating tone 800/970 Hzeja 2hl	0 0 0 0 1	800 cont
32	Siren 2 way ramp (long	500/1200Hz 3 sec rising / 3 seq fallin	0 0 0 0 0	800 cont

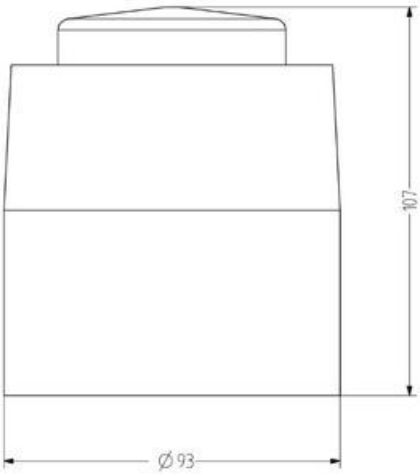



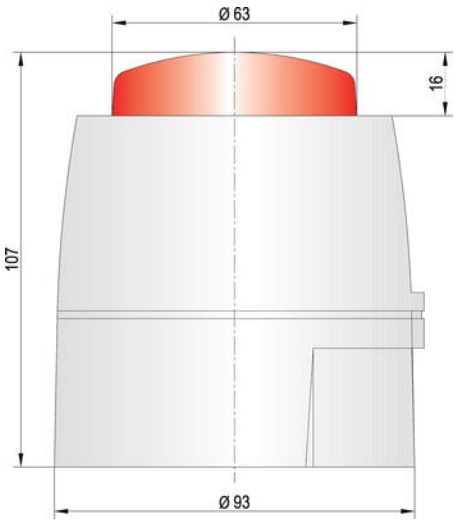



Tontabelle / Tone table

Nr.	Sound	Tone frequency	DIP-switch	2nd stage alarm [Hz]
1	LF Sweep	800 - 1000Hz @ 0.5 sec	11111	800 cont
2	Alternative warble BS standard	800/960 Hz @ 2Hz	11110	800 cont
3	Warble Tone BS standard	800/1000Hz @ 0.5 sec	11101	800 cont
4	Alternative warble BS standard	500/600Hz @ 2Hz	11100	500 cont
5	MF Back up interrupted tone	2800Hz @ 1.0 sec on/off	11011	2800 cont
6	LF Back up Alarm	800Hz @ 150 msec on/off	11010	800 cont
7	HF Back up interrupted tone - fast	2800Hz @ 150 msec on/off	11001	800 cont
8	LF Continuous tone BS5839	800 Hz cont	11000	Same tone
9	Sweep tone (1Hz)	800/900Hz @ 1Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	500-1200 3.75 sec on 0.25 sec off
11	Dutch sweep tone	970Hz cont	10101	500-1200 3.5 sec on 0.5 sec off
12	Analogue sweep tone	500/600Hz @ 2Hz	10100	500 cont
13	Sweep tone (3Hz)	800/970Hz @ 3Hz	10011	800 cont
14	Alternate HF slow sweep	2310/2910Hz @ 3Hz	10010	2400 cont
15	Fast HF sweep	2400-2800Hz @ 7Hz	10001	2400 cont
16	US Temporal Pattern LF	950Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800 cont
17	Interrupted tone BS staitdar	Interrupted tne 800Hz @ 0.5 sec on/of	01111	800 cont
18	ISO 8201 LF BS5839 Pt 1 1988	Intermittent 970Hz 500ms on/500ms of	01110	Same tone
19	Interrupted tone medium	1000Hz @ 0.25 sec on/off	01101	800 cont
20	ISO8201 HF	Intermittent 970Hz 500 ms on /500 ms off	01100	Same tone
21	Continuous tone	1000Hz continuous	01011	Same tone
22	LF Buzz	900-950Hz sweat @ 110Hz	01010	900 cont
23	MF Continuous	2800Hz	01001	2800 cont
24	Sweep tone (1Hz)	800-970Hz @ 1Hz	01000	800 cont
25	German DIN tone	Sweep 1200-500Hz @ 1Hz	00111	800 cont
26	Swedish Fire alarm	Intermittent 660Hz 150 ms on / 150 ms of	00110	Same tone
27	French tone AFNOR	554Hz for 100 ms and 440Hz for 400m	00101	800 cont
28	Swedish all clear signal	Continuous 660Hz	00100	Same tone
29	US Temperal Pattern HF	2900Hz for 0.5 sec on 0.5 off x3, off for 1.5 sec then repeat	00011	2900 cont
30	Siren 2 way ramp (short	500/1200Hz rising then falling 0.25 se	00010	800 cont
31	FP 1063.1 - Telcare	Alternating tone 800/970 Hzpls 2H	00003	800 cont
32	Siren 2 way ramp (long	500/1200Hz 3 sec rising / 3 seg fallin	00000	800 cont

