



KOMBINOVANÁ SIRÉNA S BLIKAČEM, Ø93 MM

Série CS1

C111221005

CS1 siréna/záblesk LED oranžová 24V

- Rychlá instalace díky systému bajonetových zámků
- Výběr z 32 tónů
- Akustická intenzita 86 – 106 dB
- Krytí IP 65




POPIS PRODUKTU

Sirény pro vnitřní i venkovní použití (IP 65), druh tónu je volitelný DIP-přepínači uvnitř. Oba typy lze objednat v bílé a červené barvě.

SPECIFIKACE

Barva	Oranžová
Barva těla	Bílá
Druh montáže	Horizontální, Vertikální
Frekvence blikání	1 Hz
Frekvence max.	2900 Hz
Frekvence min.	440 Hz
Hladina zvuku max.	109 dB
Hladina zvuku min.	88 dB
Hmotnost	258 g
Jmenovitý proud max.	0,041 A
Jmenovitý proud min.	0,014 A
Napájecí napětí	24 V
Napájecí napětí AC/DC max.	35 V
Napájecí napětí AC/DC min.	18 V
Ovládání zvuku	Ano

Počet tónů	32 ks
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Třída krytí	IP65
Typ zdroje	Oranžová LED
Zdroj světla	LED

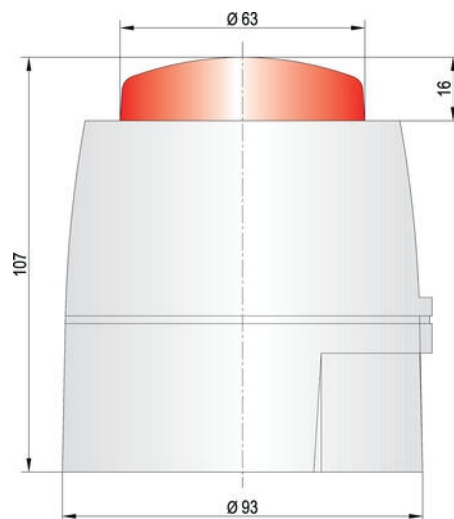

Tontabelle / Tone table

No.	Sound	Tone frequency	OP-switch	2nd stage alarm (Hz)
1	LF Sweep	800-1000Hz at 0.5sec	111111	800cont
2	Alarm tone (LF) standard	800/200Hz at 2Hz	111110	800cont
3	Warning tone (LF) standard	800/100Hz at 0.5sec	111101	800cont
4	Alarm tone (LF) extended	800/200Hz at 2Hz	111100	800cont
5	LF Back up when red tone	800Hz at 1.5sec on/off	111011	2000cont
6	LF Back up when	800Hz at 1.5sec on/off	111010	800cont
7	LF Back up when red tone - test	800Hz at 1.5sec on/off	111001	800cont
8	LF Continuous tone (LF) test	800Hz cont	111000	Some tone
9	Swarm tone (LF)	800/200Hz at 1Hz	101111	800cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	101110	3.75 sec on / 0.75 sec off
11	Dutch sweep tone	970Hz cont	101011	3.5 sec on / 0.5 sec off
12	Swedish sweep tone	500/600Hz at 2Hz	101100	800cont
13	Swarm tone (HF)	800/200Hz at 2Hz	110011	800cont
14	Alarm tone (HF) standard	800/200Hz at 2Hz	110010	2000cont
15	Fast HF sweep	2400-2600Hz at 7Hz	110001	2000cont
16	US Temporal Pattern LF	800Hz for 0.5 sec on/ 0.5 sec off x3 then 1.5 sec then repeat	101010	800 cont
17	Intermittent tone (LF) standard	Intermittent tone 800Hz at 0.5 sec on/off	011111	800 cont
18	ISO 8201 (LF) 800/200 Hz 1.5 Hz	Intermittent 970Hz 600ms on/300ms off	011110	Some tone
19	Intermittent tone (LF) test	1000Hz at 0.5 sec on/off	011101	800cont
20	ISO 8201 HF	Intermittent 520Hz 100ms on/ 100ms off	011100	Some tone
21	Continuous tone	1000Hz continuous	011011	Some tone
22	LF Buzzer	800/200Hz used at 1Hz	011010	800cont
23	LF Continuous	800Hz	011001	2000cont
24	Swarm tone (HF)	800/200Hz at 2Hz	011000	800cont
25	Swarm (HF) tone	Swarm 500/100Hz at 1Hz	001111	800cont
26	Swedish Fire alarm	Intermittent 660Hz 800ms on / 150ms off	011100	Some tone
27	French tone (LF)	800Hz for 100ms and 1400Hz 1000ms	011100	800 cont
28	Swedish fire alarm	Continuous 660Hz	001100	Some tone
29	US Temporal Pattern HF	2000Hz for 0.5 sec on 0.5 off x3 off for 1.5 sec then repeat	010111	2000 cont
30	Swarm 2 using ramp (short)	600/2000Hz rising then falling 0.75 sec	010110	800 cont
31	LF Buzzer 1 - 100ms	Intermittent tone 800/200 Hz at 1Hz	010100	800 cont
32	Swarm 2 using ramp (long)	600/2000Hz 3 sec rising / 3 sec falling	010100	800 cont

