



PNEUMATICKÉ VÁLCE G449

Série G449

G449A54K0100A00

Pneumatický válec G449 Ø50 100 mm


- ISO 21287
- Ø20mm až 100mm
- Zdvih 5mm až 100mm
- Jedno nebo dvojčinné




POPIS PRODUKTU

SPECIFIKACE


Druh montáže	Nezávislý
Funkce 1	Dvoučinný, Nepřerušeno
Materiál čela	Hliník
Materiál těla	Eloxovaný hliník
Max. dovolený tlak	10 bar
Pístnice	Pochromovaná kalená ocel
Pracovní tlak dvoučinný max.	10 bar
Pracovní tlak dvoučinný min.	0 bar
Připojení pro pilotní vzduch	G1/8
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Průměr pístu	50 mm
Těsnění pístnice	PUR
Těsnění pístu	PUR
Vnitřní díly	Hliník, POM
Vodící lišta	Nerez ocel
Zdvih	100 mm




(9) E for cylinder med styrt kolvslag

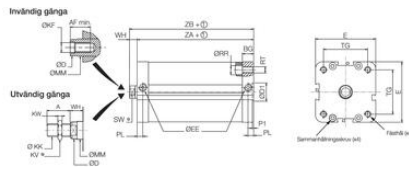

SINGLE-ROD TYPE CYLINDER D 20-25

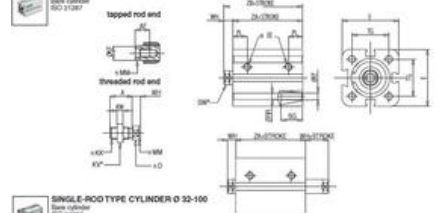

SINGLE-ROD TYPE CYLINDER D 32-100

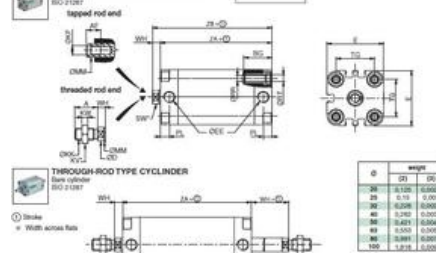

THROUGH-ROD TYPE CYLINDER

Technical drawings of cylinder end views showing dimensions and labels for different configurations.

		weight	
		(1)	(2)
20	16	0.125	0.0028
25	16	0.15	0.003
32	16	0.228	0.0038
40	16	0.325	0.0053
50	16	0.421	0.0068
63	16	0.553	0.0093
80	16	0.691	0.0098
100	16	1.018	0.0098

(1) Cylinder weight at 2 mm stroke
(2) Weight to be added per side around min length

SINGLE-ROD TYPE CYLINDER D 20-25

Technical drawings of cylinder end views showing dimensions and labels for different configurations.

SINGLE-ROD TYPE CYLINDER D 32-100

Technical drawings of cylinder end views showing dimensions and labels for different configurations.

THROUGH-ROD TYPE CYLINDER

Technical drawings of cylinder end views showing dimensions and labels for different configurations.

		weight	
		(1)	(2)
20	16	0.125	0.0028
25	16	0.15	0.003
32	16	0.228	0.0038
40	16	0.325	0.0053
50	16	0.421	0.0068
63	16	0.553	0.0093
80	16	0.691	0.0098
100	16	1.018	0.0098

(1) Cylinder weight at 2 mm stroke
(2) Weight to be added per side around min length