



## TERMOMETRY F73

Série F73

F73-3904857

Termometr Ø100 0-60°C 90x13mm L=3m

- Plynové
- Teplota -200°C až 700°C
- Ø100, Ø160 mm
- Připojení kapilára
- ATEX, GOST, EAC




### POPIS PRODUKTU

### SPECIFIKACE


|                          |                              |
|--------------------------|------------------------------|
| Capillary diameter       | 2 mm                         |
| Capillary length         | 3000 mm                      |
| Insertion length         | 90 mm                        |
| Material Capillary       | Nerez ocel 316Ti             |
| Materiál kontaktní části | Nerez ocel 316               |
| Materiál průhledu        | Laminované bezpečnostní sklo |
| Materiál těla            | Nezestavovaná ocel 1,4301    |
| Plug diameter            | 13 mm                        |
| Provozní teplota max.    | 60 °C                        |
| Provozní teplota min.    | 0 °C                         |
| Průměr                   | 100 mm                       |
| Teplota okolí do         | 60 °C                        |
| Teplota okolí od         | -40 °C                       |
| Třída krytí              | IP65                         |

Model F73, with capillary and instrument mounting bracket

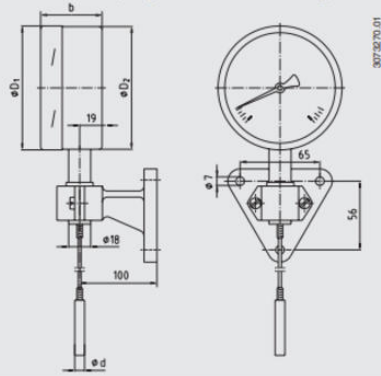

3073270.01


Model F73, with capillary and panel mounting flange

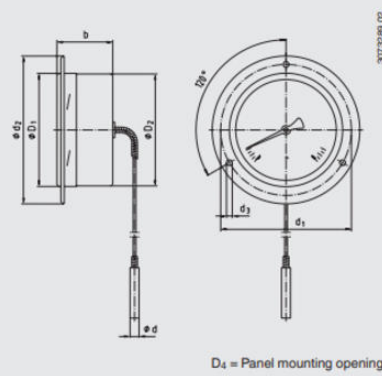

3073280.02


D<sub>4</sub> = Panel mounting opening

Model F73, with capillary and triangular bezel with clamp

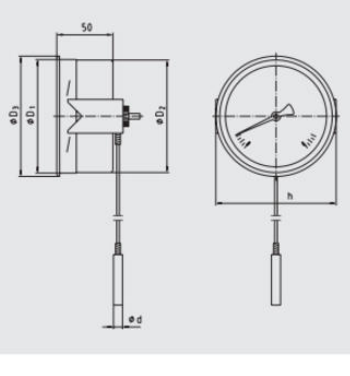


3073297.02

Model F73.100, with capillary and surface mounting flange

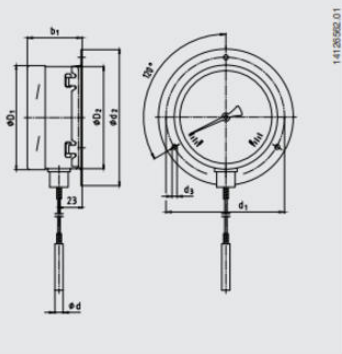


14126502.01

Model F73.160, with capillary and surface mounting flange

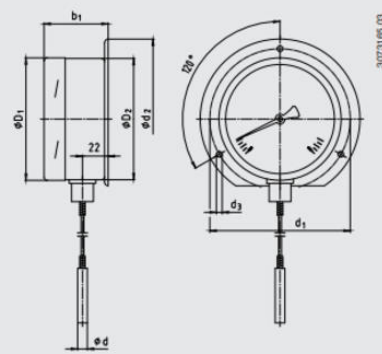


3073166.03

Model F73, with contact bulb  
Capillary and instrument mounting bracket

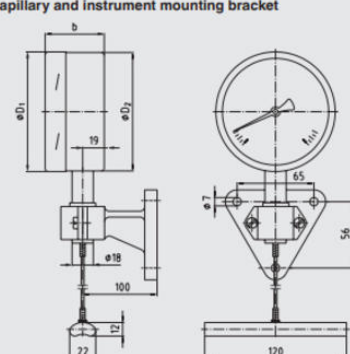

3107957.01


Model F73, with contact bulb  
Capillary and panel mounting flange

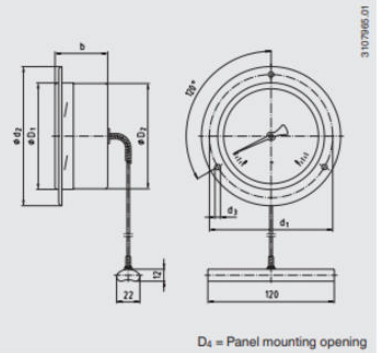

3107966.01


D<sub>4</sub> = Panel mounting opening

Model F73, with contact bulb  
Capillary and triangular bezel with clamp

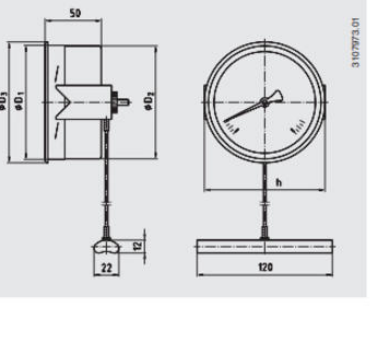


3107973.01

Model F73.100, with contact bulb  
Capillary and surface mounting flange

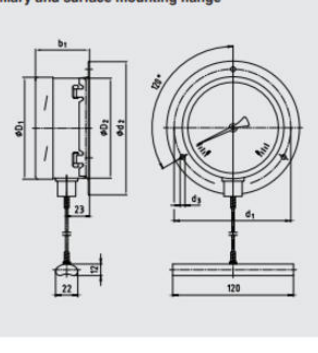

14126503.01

Model F73.160, with contact bulb  
Capillary and surface mounting flange

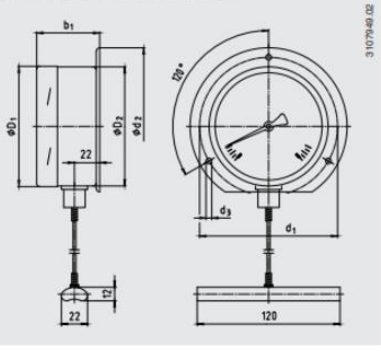

3107946.02

