




## 2-4 PÓLOVÉ ROZVODOVÉ BLOKY

RPB1005

2pólová svorkovnice - RPB 125-14

- 40 A až 160 A.
- Samozhášivá izolační konstrukce UL 94-V0
- Izolace mezi fázemi
- Mosazné vodiče

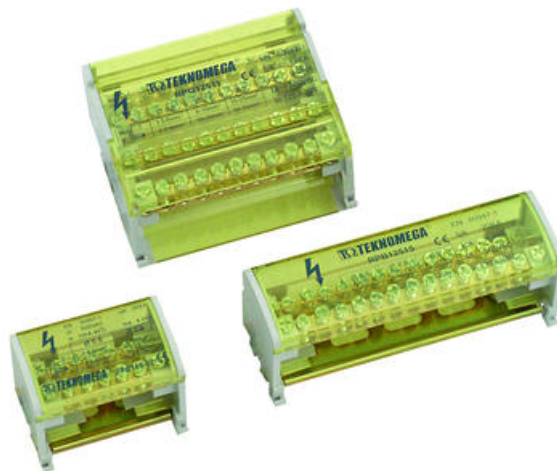

### POPIS PRODUKTU

### SPECIFIKACE

|                                                          |                    |
|----------------------------------------------------------|--------------------|
| Connections                                              | 15                 |
| Fix. Hole space                                          | 112 mm             |
| Height (H)                                               | 46 mm              |
| Input A: diameter                                        | 9 mm               |
| Input A: torque, max.                                    | 3 Nm               |
| Input A: torque, min.                                    | 2 Nm               |
| Input A: wire cross-section stranded, max.               | 35 mm <sup>2</sup> |
| Input A: wire cross-section stranded, min.               | 10 mm <sup>2</sup> |
| Input A: wire cross-section with wire-end ferrules, max. | 25 mm <sup>2</sup> |
| Input A: wire cross-section with wire-end ferrules, min. | 10 mm <sup>2</sup> |
| Length (L)                                               | 132 mm             |
| Nominal insulation voltage                               | 500 V              |
| Nominální proud                                          | 125 A              |
| Number of inputs A                                       | 1                  |
| Number of outputs A                                      | 1                  |
| Number of outputs B                                      | 11                 |
| Number of outputs C                                      | 2                  |

|                                                                           |                         |
|---------------------------------------------------------------------------|-------------------------|
| <b>Output A: diameter</b>                                                 | 9 mm                    |
| <b>Output A: torque, max.</b>                                             | 3 Nm                    |
| <b>Output A: torque, min.</b>                                             | 2 Nm                    |
| <b>Output A: wire cross-section stranded with wire-end ferrules, max.</b> | 25 mm <sup>2</sup>      |
| <b>Output A: wire cross-section stranded with wire-end ferrules, min.</b> | 10 mm <sup>2</sup>      |
| <b>Output A: wire cross-section stranded, max.</b>                        | 35 mm <sup>2</sup>      |
| <b>Output A: wire cross-section stranded, min.</b>                        | 10 mm <sup>2</sup>      |
| <b>Output B: diameter</b>                                                 | 5,5 mm                  |
| <b>Output B: torque, max.</b>                                             | 3 Nm                    |
| <b>Output B: torque, min.</b>                                             | 2 Nm                    |
| <b>Output B: wire cross-section stranded with wire-end ferrules, max.</b> | 6 mm <sup>2</sup>       |
| <b>Output B: wire cross-section stranded with wire-end ferrules, min.</b> | 1,5 mm <sup>2</sup>     |
| <b>Output B: wire cross-section stranded, max.</b>                        | 6 mm <sup>2</sup>       |
| <b>Output B: wire cross-section stranded, min.</b>                        | 2,5 mm <sup>2</sup>     |
| <b>Output C: diameter</b>                                                 | 7,5 mm                  |
| <b>Output C: torque, max.</b>                                             | 3 Nm                    |
| <b>Output C: torque, min.</b>                                             | 2 Nm                    |
| <b>Output C: wire cross-section stranded with wire-end ferrules, max.</b> | 16 mm <sup>2</sup>      |
| <b>Output C: wire cross-section stranded with wire-end ferrules, min.</b> | 6 mm <sup>2</sup>       |
| <b>Output C: wire cross-section stranded, max.</b>                        | 25 mm <sup>2</sup>      |
| <b>Output C: wire cross-section stranded, min.</b>                        | 10 mm <sup>2</sup>      |
| <b>Screw type</b>                                                         | Galvanized steel screws |
| <b>Short-circuit current resistance ICW over 1s</b>                       | 4,2 kA                  |
| <b>Short-circuit current resistance IPK (peak value)</b>                  | 20 kA                   |
| <b>Třída krytí</b>                                                        | IP20                    |
| <b>Width (P)</b>                                                          | 51 mm                   |

