



KOMBINOVANÁ SIRÉNA S BLIKAČEM, Ø93 MM

Série CS1

C111622005

CS1 siréna/záblesk LED červená 24V

- Rychlá instalace díky systému bajonetových zámků
- Výběr z 32 tónů
- Akustická intenzita 86 – 106 dB
- Krytí IP 65




POPIS PRODUKTU

Sirény pro vnitřní i venkovní použití (IP 65), druh tónu je volitelný DIP-přepínači uvnitř. Oba typy lze objednat v bílé a červené barvě.

SPECIFIKACE



Barva	Červená
Barva těla	Červená
Druh montáže	Horizontální, Vertikální
Frekvence blikání	1 Hz
Frekvence max.	2900 Hz
Frekvence min.	440 Hz
Hladina zvuku max.	109 dB
Hladina zvuku min.	88 dB
Hmotnost	258 g
Jmenovitý proud max.	0,041 A
Jmenovitý proud min.	0,014 A
Napájecí napětí	24 V
Napájecí napětí AC/DC max.	35 V
Napájecí napětí AC/DC min.	18 V
Ovládání zvuku	Ano

Počet tónů	32 ks
Provozní teplota max.	70 °C
Provozní teplota min.	-20 °C
Třída krytí	IP65
Typ zdroje	Oranžová LED
Zdroj světla	LED

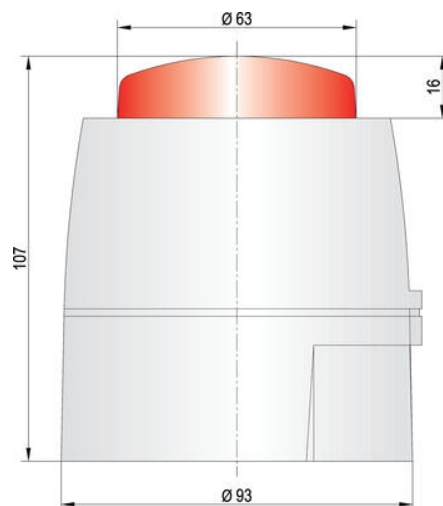

Tontabelle / Tone table

No.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	LF Siren	800 Hz on 0.5 sec	11111	800 cont
2	Overhead siren BS standard	920 Hz on 2s	11111	800 cont
3	Mobile Tone BS standard	800/1000 Hz on 0.5 sec	11101	800 cont
4	Overhead siren BS standard	1000 Hz on 2s	11100	800 cont
5	LF Back up siren	800 Hz on 0.5 sec on/off	11011	200 cont
6	LF Back up alarm	800 Hz on 1.0 sec on/off	11010	800 cont
7	LF Back up siren and tone - Int	800 Hz on 1.0 sec on/off	11001	800 cont
8	LF Chirp siren BS BS02	800 Hz cont	11000	Siren tone
9	Siren tone 1 Hz	800/200 Hz on 1 Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970 Hz 0.25 sec on/0.25 sec off	10110	3.75 sec on 0.25 sec off 800/200
11	Dutch sweep tone	970 Hz cont	10101	3.75 sec on 0.5 sec off 800/200
12	Overhead siren tone	1000 Hz on 2s	10100	800 cont
13	Overhead tone 2 Hz	800/200 Hz on 2s	10011	800 cont
14	Overhead LF siren tone	800/200 Hz on 2s	10010	200 cont
15	Test tone	800/200 Hz on 2s	10001	200 cont
16	US Temporal Pattern LF	250 Hz for 0.5 sec on 0.5 sec off	10000	800 cont
17	Intermittent tone BS standard	Intermittent tone 800 Hz on 0.5 sec on/off	01111	800 cont
18	BS BS01 LF BS02 BS1 BS2	Intermittent 970 Hz 0.25 sec on/0.25 sec off	01110	Siren tone
19	Intermittent tone BS01	1000 Hz on 0.5 sec on/off	01101	800 cont
20	BS02 BS1	Intermittent 200 Hz 0.5 sec on/off	01100	Siren tone
21	Continuous tone	800 Hz cont	01011	Siren tone
22	LF Siren	800/200 Hz on 0.5 sec	01010	800 cont
23	LF Chirp siren	800 Hz	01001	200 cont
24	Overhead tone 2 Hz	800/200 Hz on 2s	01000	800 cont
25	German LF tone	Siren 1200/800 Hz on 1 Hz	00111	800 cont
26	Overhead tone 2 Hz	Intermittent 660 Hz 0.5 sec on / 0.5 sec off	00110	Siren tone
27	French tone BS01	1000 Hz for 0.5 sec and 1000 Hz for 0.5 sec	00100	800 cont
28	Overhead LF siren	Intermittent 800 Hz on 0.5 sec on/off	00101	Siren tone
29	US Temporal Pattern HP	200 Hz for 0.5 sec on 0.5 sec off	00011	200 cont
30	Siren 2 tone ramp 1/short	800/200 Hz rising then falling @ 25 Hz	00010	800 cont
31	PP BS01 - 1 tone	Intermittent tone 800/200 Hz on 0.5 sec	00001	800 cont
32	Siren 2 tone ramp 1/long	800/200 Hz 3 sec rising / 3 sec falling	00000	800 cont

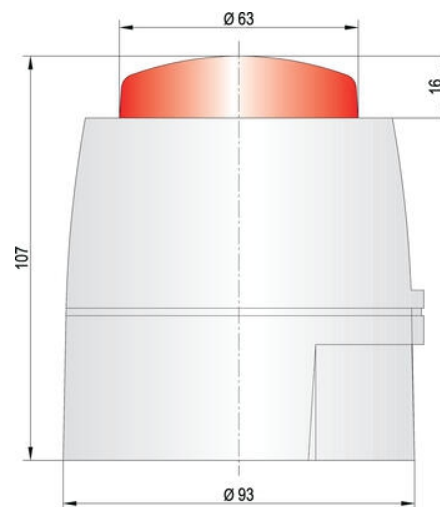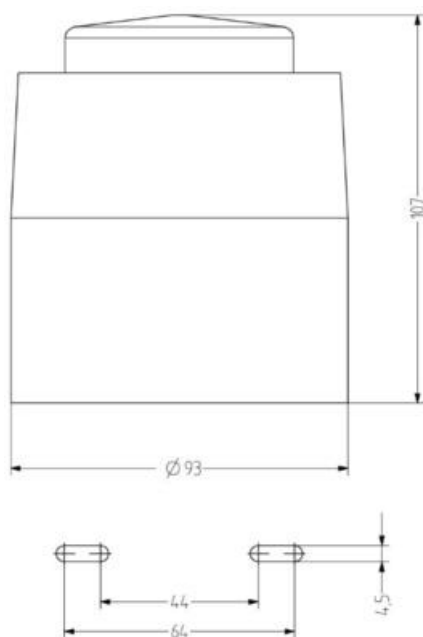

Nr.	Sound	Tone frequency	DR switch	2nd stage alarm (Hz)
1	1-F Buzzer	800 - 1000Hz at 0.5 sec	11111	800 cont
2	Alarm tone 1st stage	800/600Hz at 2Hz	11110	800 cont
3	Alarm tone 2nd stage	800/1000Hz at 0.5 sec	11101	800 cont
4	Alarm tone 3rd stage	800/600Hz at 2Hz	11100	800 cont
5	1-F Buzzer at interrupted tone	800Hz at 1.0 sec on/off	11011	800 cont
6	1-F Buzzer at 100ms	800Hz at 100 msec on/off	11010	800 cont
7	1-F Buzzer at interrupted tone - fast	800Hz at 1.0 sec on/off	11001	800 cont
8	1-F Alarm tone 1st stage	800Hz cont	11000	800 tone
9	Alarm tone 1 1st	800/600Hz at 1Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	10110	800/1000 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	10101	0.5 sec on 0.5 sec off
12	Alarm tone 2nd stage	800/600Hz at 2Hz	10100	800 cont
13	Alarm tone 3rd	800/1000Hz at 2Hz	10011	800 cont
14	Alarm tone 1-F alarm tone	800/600Hz at 2Hz	10010	800 cont
15	1-F Buzzer	800/600Hz at 0.5 sec	10001	800 cont
16	US Temporal Pattern 1-F	800Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800 cont
17	Interrupted tone 800Hz	Interrupted tone 800Hz at 0.5 sec on/off	01111	800 cont
18	800/800 1-F 800/800 1-F 1-F	Intermittent 970Hz 500ms on/500ms off	01110	800 tone
19	Alarm tone 1st stage	800Hz at 1.0 sec on/off	01101	800 cont
20	800/800 1-F	Intermittent 970Hz 500ms on/500ms off	01100	800 tone
21	Continuous tone	1020Hz continuous	01011	800 tone
22	1-F Buzzer	800/600Hz on/off at 112Hz	01010	800 cont
23	1-F Continuous	800Hz	01001	800 cont
24	Alarm tone 2nd	800/1000Hz at 2Hz	01000	800 cont
25	German 1-F tone	800Hz at 1.0 sec on 0.5 sec off	00111	800 cont
26	Swedish 1-F tone	Intermittent 600Hz 150 ms on / 500 ms off	00110	800 tone
27	French tone at 800	800Hz for 100 ms and within 500ms	00100	800 cont
28	Swedish 1-F tone	800Hz at 1.0 sec on 0.5 sec off	00100	800 tone
29	US Temporal Pattern 1-F	800Hz for 0.5 sec on 0.5 sec off off for 1.5 sec then repeat	00011	800 cont
30	Alarm 2 stage alarm 1st	800/1000Hz on/off then 1000Hz 0.5 sec	00010	800 cont
31	1-F 1000Hz 1st	Intermittent tone 800/1000Hz 1st	00000	800 cont
32	Alarm 2 stage alarm 2nd	800/1000Hz 0.5 sec on/off / 3 sec hold	00000	800 cont

