



SOLENOIDOVÝ AKTUÁTOR ER

Série ER

ER60-05/C

- Jednočinný, vratná pružina
- Vinutí třídy F (155°C)
- Pracovní cyklus 0 až 100 %
- Síla až 234N
- K dispozici speciální provedení



POPIS PRODUKTU

Elektromagnetická řada ER se vyznačuje jednočinným provozem.

Když se na cívku přivede napětí, pohybuje se píst vlivem vytvořeného magnetického pole, dokud nedosáhne koncové polohy.

Při odpojení napájení se píst působením zátěže nebo vratné pružiny vrátí do výchozí polohy.


K dispozici je řada standardních verzí (katalog PDF níže) a je také možné vyrobit speciální verzi na míru.

SPECIFIKACE

Absorbed power @ 20°C, 100% duty	18 W
Absorbed power @ 20°C, 15% duty	110 W
Absorbed power @ 20°C, 25% duty	70 W
Absorbed power @ 20°C, 40% duty	45 W
Absorbed power @ 20°C, 5% duty	280 W
Beginning of stroke force at 100% duty	7 N
Beginning of stroke force at 15% duty	47 N
Beginning of stroke force at 25% duty	28 N
Beginning of stroke force at 40% duty	18 N
Beginning of stroke force at 5% duty	96 N
Celková hmotnost	650 g
End of stroke force at 100% duty	155 N
End of stroke force at 15% duty	346 N
End of stroke force at 25% duty	296 N
End of stroke force at 40% duty	192 N

End of stroke force at 5% duty	382 N
Insulation class	B (130°C)
Max. napětí AC	230 V
Max. napětí DC	205 V
Min. napětí AC	110 V
Min. napětí DC	6 V
Spring return	Ano
Třída krytí	IP00
Zdvih	5 mm

Force stroke curve

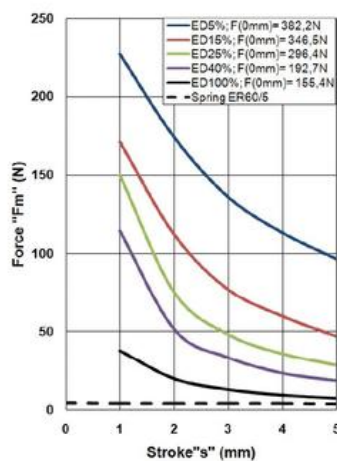

Calculation of the effective force: see pages 1 and 10

Duty-cycle ED%	Standard voltages							Under demand voltages			
	VDC							VAC		VDC	
	6	12	24	48	100	125	205	110	230	Min	Max
100%	x	o	o	o	o	o	o	o	o	7	230
40%	x	o	o	o	o	o	o	x	o	11	230
25%	x	x	o	o	o	o	o	x	o	13	230
15%	x	x	o	o	o	o	o	x	x	16	230
5%	x	x	o	o	o	o	o	x	x	24	230

Layout: o = Available ; x = Unavailable

Solenoid under voltage

