




2-4 PÓLOVÉ ROZVODOVÉ BLOKY

RPB1005

2pólová svorkovnice - RPB 125-14

- 40 A až 160 A.
- Samozhášivá izolační konstrukce UL 94-V0
- Izolace mezi fázemi
- Mosazné vodiče

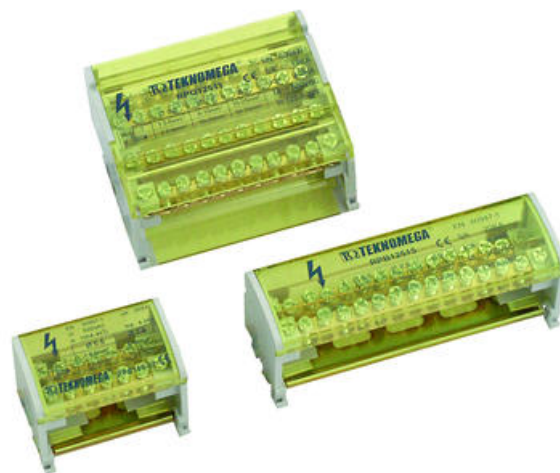

POPIS PRODUKTU

SPECIFIKACE

Connections	15
Fix. Hole space	112 mm
Height (H)	46 mm
Input A: diameter	9 mm
Input A: torque, max.	3 Nm
Input A: torque, min.	2 Nm
Input A: wire cross-section stranded, max.	35 mm ²
Input A: wire cross-section stranded, min.	10 mm ²
Input A: wire cross-section with wire-end ferrules, max.	25 mm ²
Input A: wire cross-section with wire-end ferrules, min.	10 mm ²
Length (L)	132 mm
Nominal insulation voltage	500 V
Nominální proud	125 A
Number of inputs A	1
Number of outputs A	1
Number of outputs B	11
Number of outputs C	2

Output A: diameter	9 mm
Output A: torque, max.	3 Nm
Output A: torque, min.	2 Nm
Output A: wire cross-section stranded with wire-end ferrules, max.	25 mm ²
Output A: wire cross-section stranded with wire-end ferrules, min.	10 mm ²
Output A: wire cross-section stranded, max.	35 mm ²
Output A: wire cross-section stranded, min.	10 mm ²
Output B: diameter	5,5 mm
Output B: torque, max.	3 Nm
Output B: torque, min.	2 Nm
Output B: wire cross-section stranded with wire-end ferrules, max.	6 mm ²
Output B: wire cross-section stranded with wire-end ferrules, min.	1,5 mm ²
Output B: wire cross-section stranded, max.	6 mm ²
Output B: wire cross-section stranded, min.	2,5 mm ²
Output C: diameter	7,5 mm
Output C: torque, max.	3 Nm
Output C: torque, min.	2 Nm
Output C: wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Output C: wire cross-section stranded with wire-end ferrules, min.	6 mm ²
Output C: wire cross-section stranded, max.	25 mm ²
Output C: wire cross-section stranded, min.	10 mm ²
Screw type	Galvanized steel screws
Short-circuit current resistance ICW over 1s	4,2 kA
Short-circuit current resistance IPK (peak value)	20 kA
Třída krytí	IP20
Width (P)	51 mm

